

	I	Q	н т	m	0



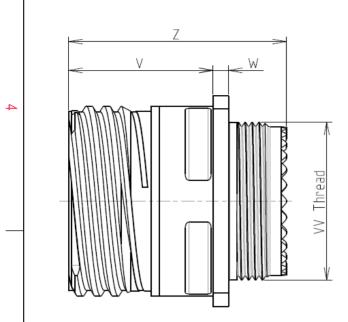

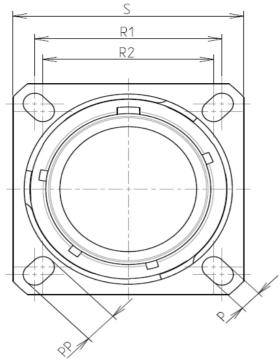

Keying Shov

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ω

 \mathbf{N}

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy $0.8 \mu m$ minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C

> : 2000 hours : 11.8 g ± 10%

> > 8D 0

G

11

-

Х

02

S

F

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

	т			0		Φ	А		
R	1								4
ng Shown at	Connector dimension]		LAYOUT	T SHOWN AS EXAMI	PLE			3
	Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 20.62				SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed PN: 8D011X02SC				
C			A 08-10-2016 ISS DATE Designed By: TITLE SCALE	First Release Latest modification - b Date:		custo eceptacle 8D s	OMER DRAWING Series RDS / PROJECT 859	MOD N°	-
ORIENTATION : C CONTACT TYPE : SOCKET(500 Matings) CONTACT LAYOUT : 11-02			SOURIAU This document is the proper SOURIAU SOURIAU it must not be reproduced communicated without perm FORMAT SOURIAU DRG N° A3 8D011X02SC-C			ed or	1		
	E	1	D	С		B	А		

ſ	工	Q	т.	m	D	0
		Contact Layout				Panel Cutou
4	.0. (2.	+Y IB IA +Y +X +X 95 -Y .095 (2.4imm)			Σ -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Cont positi ID A B Shell Arrangement size no. 11 -2	X-axis (mm) Y-axis (mm) +.095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	tact tion II		¥ (Dim
ى ت						ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011
					A 08-10-201 ISS DATE Designed By:	16 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT	J WWW.SOURIAU.C SOURIAU
		<u>^</u>			A3	8D011X
	Н	G	F	I E	D	C

