

**Ratings**

Temperature: -40 ~ 70 °C

Voltage: 150 V

**Conductor**Gauge: 32 AWG, 0.039 mm<sup>2</sup>

Material: tinned copper strands

Strand size:  $\phi 0.05 \times 19$ Resistance at 20 °C: 590  $\Omega$ /km**Insulator**

Material: HDPE

Color: black, white, yellow, red

Outer diameter:  $\phi 0.55 \pm 0.05$  mm

Nominal thickness: 0.15 mm

Resistance at 20 °C: 1000 M $\Omega$ /km**Shield**

Type: spiral

Material: tinned copper strands

Strand size:  $\phi 0.08$ 

Coverage: 90 % minimum

**Outer jacket**

Material: TPU, 70 °C

Color: gray

Nominal thickness: 0.50 mm

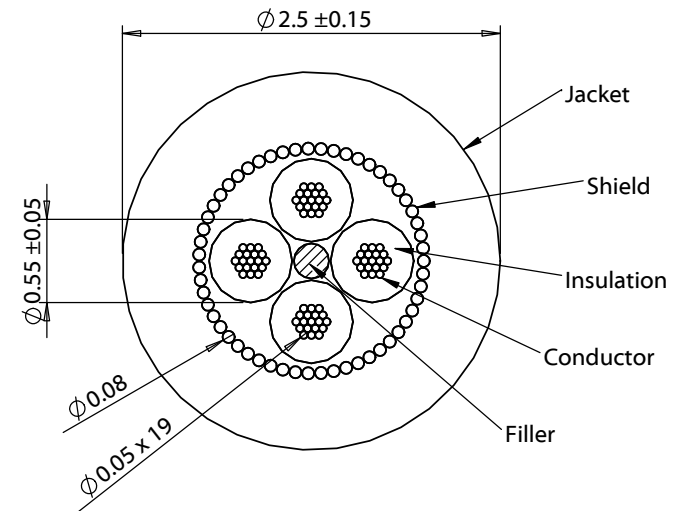
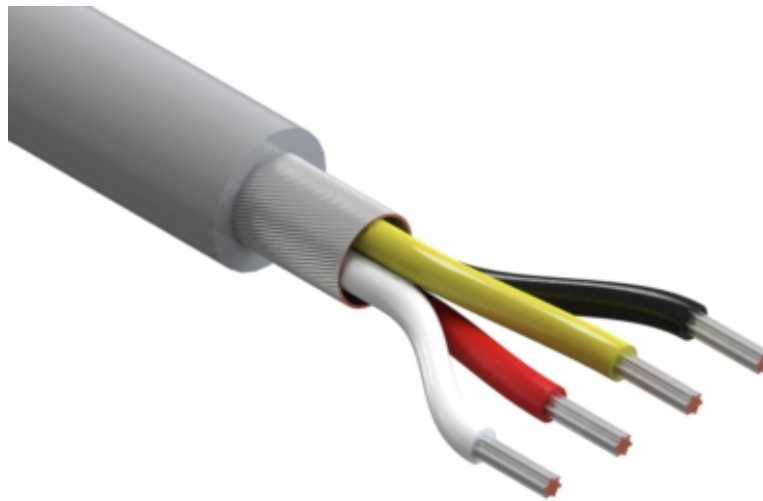
Diameter:  $\phi 2.5 \pm 0.15$  mm**Filler**

Material: Aramid fiber

**Tests**

Tensile strength: 25.5 kgf

Dielectric test: 1500 V dc for 1 minute without breakdown

Bend test at 200 g,  $\pm 90^\circ$ , 30 cycles /min: 10,000 cycle minimum

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>		
A	4/24/2015	Initial release		RoHS and REACH compliant			
A1	1/13/2016	Updated notes, corrected tolerances	VERIFIED:	Jacket meets ISO 10993 Biological Compatibility	A	30-00445	
A2	1/17/2019	Changed filler material to generic name		Phthalate and halogen free	SCALE: 20:1		
			DIMENSIONS ARE IN MILLIMETERS	Function: no open, no short circuit, no intermittent	SHEET 1 OF 1		
			TOLERANCES: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	DESCRIPTION: Wire, 4C TS, 32 AWG, 150V, 70C, 2.5 mm, spiral shield, TPU, gray			