

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER


ORIGINAL

(1)

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

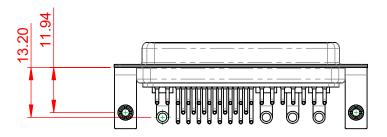

POWER/CO-AX CONTACT RATING:	30A (CURRENT)
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.

.X ±0.25 .XX ±0.13

.XXX ±0.05

10.70

5.80

11.94

2.54

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:



5000MΩ min.

-55°C ~ 125°C

C

	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINATION			DATE: JAN. 01/20	19		
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-36W4240-3NB ISSU		ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-36W4	4240-3NB	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT

