


04-.156 (3.96) Dia. Mounting Holes

Contact Detail

523-P.C. Tail .025 Sq.(0.64 Sq.) - Tail LG=.390(9.91) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing


.160 [4.06] Point of Contact-



0.600 [15.24]

0.330[8.38] Card Slot 1

96] Contact Spacing x .200 [5.08] Row Spacing 4.650 [118.11] 4.340 [110.24] 4.054 [102.97] 3.908 [99.26] Card Slot Accepts .054 [1.37] to .070 [1.78] Thick P.C. Board 0.370 [9.40]

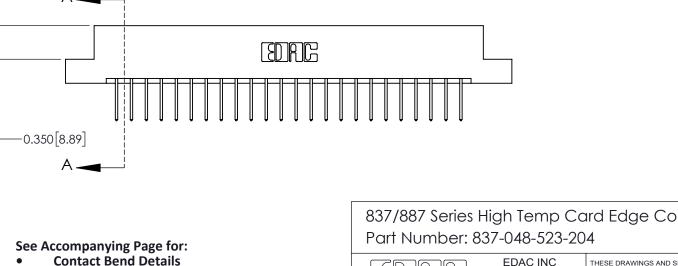

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

TORONTO, ONTARIO

CANADA

YOUR CONNECTION TO QUALITY & SERVICE

	SECTION A	A-A
onnector	ACAD REFERENCE NO.	837 ENG MASTER
	DRAWN: J.LEE	DATE: OCT. 06/09
	CHECKED:	DATE:
SPECIFICATIONS EDAC INC.,AND JCED,OR COPIED	SCALE: NTS	SHEET 1 OF 2
	DRAWING NUMBER	ISSUE

837 Assembly

1

