


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0879370502](#)
Status: **Active**
Overview: [KK Interconnect Solutions](#)
Description: KK 254 PCB Header, Single Row Dual Body, Through Hole, Vertical, 5 Circuits, 2.50µm Tin (Sn) Plating, 11.00mm Stacking Height, Tray Packaging, Lead-Free

Documents:

3D Model	Packaging Specification PK-89990-489-001 (PDF)
Drawing (PDF)	Test Summary 879200000-TS-000 (PDF)
3D Model (PDF)	Test Summary 879200001-TS-000 (PDF)
Product Specification PS-87920-019-001 (PDF)	RoHS Certificate of Compliance (PDF)

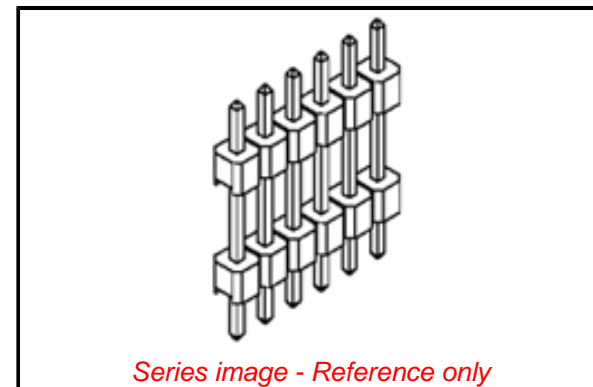

Agency Certification

CSA	LR19880
UL	E29179

General

Product Family	PCB Headers
Series	87937
Application	Board-to-Board, Signal, Wire-to-Board
Overview	KK Interconnect Solutions
Product Name	KK 254
UPC	822350104937

Physical

Breakaway	Yes
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height	3.78mm
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Nickel
Material - Resin	Nylon
Net Weight	0.364/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.76mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	2.540µm
Plating min - Termination	1.270µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[87937](#) Series

Mates With

[4455](#) KK 254 PCB Receptacles,

Temperature Range - Operating -55° to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 3.0A
Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 014
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 265

Material Info

Reference - Drawing Numbers

Packaging Specification PK-89990-489-001
Product Specification PS-87920-019-001
Sales Drawing SD-87937-007-000
Test Summary 879200000-TS-000, 879200001-TS-000

This document was generated on 07/29/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION