

ITEM	PART#	DESCRIPTION	QTY	UOM
A	334720606	MX150 ASSY RCP 2x3 CPA BLK A/6	1	PC
C	330123001	MX150 RCPT 0.3 TIN 14/16AWG D WIND SLD	6	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A3	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A4	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A5	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A6	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

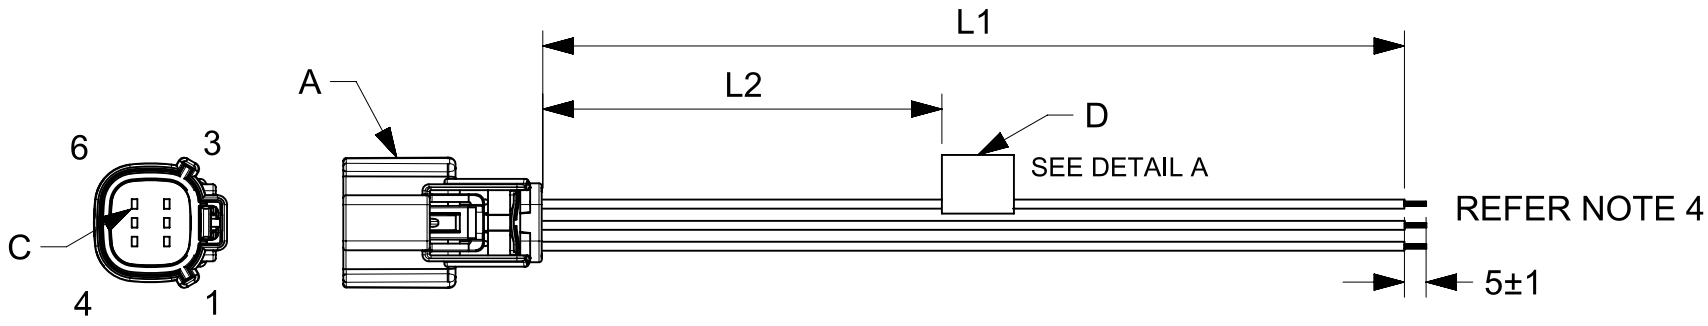


TABLE			
PART NUMBER	L1	L2	TITLE
2162861061	150±8	63 REF	MX150 R-S DR 6ckt 150mm Sn sealed cable
2162861062	300±10	138 REF	MX150 R-S DR 6ckt 300mm Sn sealed cable
2162861063	600±10	288 REF	MX150 R-S DR 6ckt 600mm Sn sealed cable

- NOTES**
1. Connector view shown is from mating side.
 2. Label text must be 2mm max. in height with Arial font.
 3. Label must be wrapped in flag type on a single cable.
 4. The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must be 2.2mm max
 5. Sealing should pass the IP67 rating as defined by product spec.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:				
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)				
mm	NTS	ANGULAR TOL ± °					
4 PLACES ±		EC NO: 643544					
3 PLACES ±		DRWN: NNANKOLA 2020/06/29		REFER THE TABLE PRODUCT CUSTOMER DRAWING			
2 PLACES ±		CHK'D: SD 2020/08/31					
1 PLACE ±		APPR: SD 2020/08/31					
0 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A4-SIZE	216286	2162861061	GENERAL MARKET	1 OF 1