

Interface module - VIP-3/PT/D37SUB/F - 2903784


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connections and D-SUB 37 socket connector, for mounting on NS 35 rails



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 814768
GTIN	4046356814768

Technical data

Dimensions

Width	72.3 mm
Height	75.8 mm
Depth	63 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	25 V AC
	60 V DC
Max. perm. current (per branch)	2 A
Number of positions	37
Status display	No
Mounting position	any

Connection data

Connection name	Field level
Connection method	Push-in connection

Interface module - VIP-3/PT/D37SUB/F - 2903784

Technical data

Connection data

Stripping length	8 mm
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Connection data 2

Connection name	Controller level
Connection method	D-SUB socket strip
Number of connections	1
Number of positions	37

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
Rated surge voltage	1.2 kV
Degree of pollution	2
Overvoltage category	II
Flammability rating according to UL 94	V0


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Interface module - VIP-3/PT/D37SUB/F - 2903784

Circuit diagram

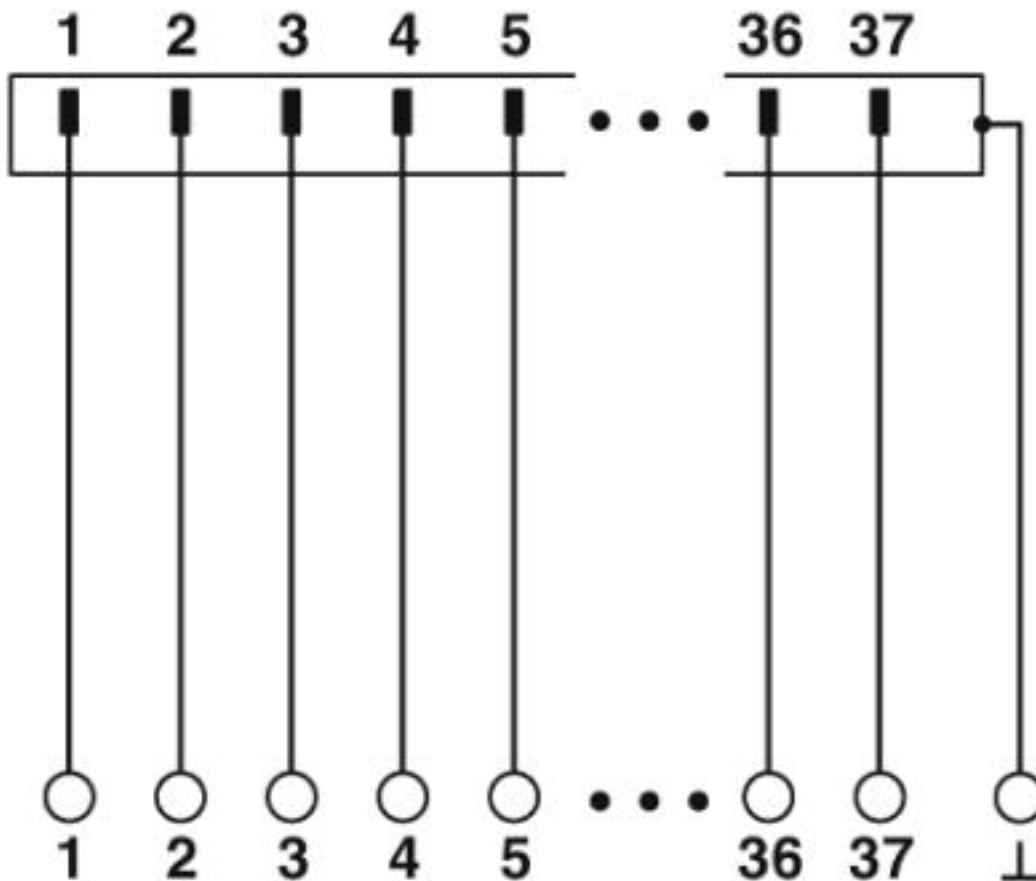

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / CSAus / EAC / cULus Recognized / cCSAus

Ex Approvals


Approval details


CSA		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN		105 V	


Interface module - VIP-3/PT/D37SUB/F - 2903784


Approvals


Nominal current IN	2 A
mm ² /AWG/kcmil	26-14


UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	2 A		
mm ² /AWG/kcmil	26-14		

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	2 A		
mm ² /AWG/kcmil	26-14		

CSAus		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	105 V		
Nominal current IN	2 A		
mm ² /AWG/kcmil	28-14		

EAC			RU C- DE.A*30.B.01742
-----	---	--	--------------------------

cULus Recognized			
------------------	---	--	--

cCSAus			
--------	---	--	--

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>