




(1)







TOLERANCE UNLESS OTHERWISE SPECIFIED		THIS I DO NO
.X.	±0.25	
.XX	±0.13	
.XXX	±0.05	



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED	
OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)	A
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	
INSULATOR RESISTANCE:	5000MΩ min.	0
DIELECTRIC WITHSTANDING VOLTAGE:	1000V AC rms	~
WITTOT ADDITO VOLIMOL.		

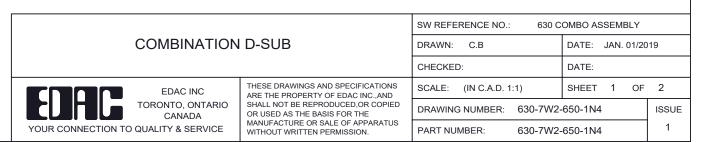



THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES

2011/65/EU FOR RoHS COMPLIANCY.

J

COMPLIANT

