

TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER

(1)





NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Insulator resistance: 1000V AC rms} \\ \mbox{Insulator resist$


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/207	19	
			CHECKED:	DATE:	
Γ	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-9W4-250-2T6		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-9W4-	-250-2T6	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. UL94V-0

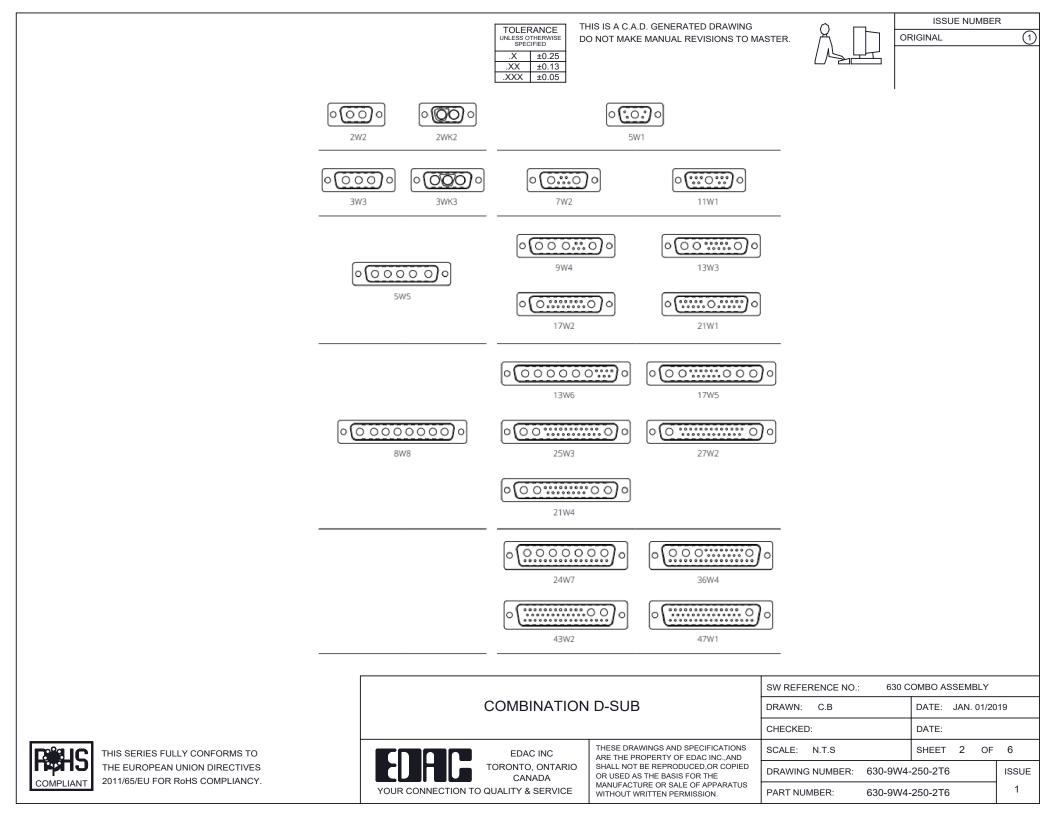



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female





PCB EDGE

5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE




21W4 Male/Female


27W2 Male/Female

22.70

5W5 Female




8W8 Female









PCB EDGE


SW REFERENCE NO. 630 COMBO ASSEMBLY COMBINATION D-SUB C.B DATE: JAN. 01/2019 DRAWN: CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS 3 OF 4 SCALE: N.T.S SHEET EDAC INC ARE THE PROPERTY OF EDAC INC..AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 630-9W4-250-2T6 DRAWING NUMBER: ISSUE OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS 1 YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: 630-9W4-250-2T6 WITHOUT WRITTEN PERMISSION.

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2




THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.





17W2 Male/Female



TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.
















13W3 Male





25W3 Male





2.77

24.77


23.36

PCB EDGE


31.75

21.9

36W4 Female

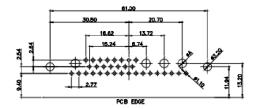

13W6 Male

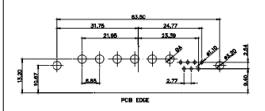



30.50

2.77

22.16

20.78

13W6 Female

13W3 Female

.X ±0.25 .XX ±0.13 .XXX ±0.05

43W2 Female




17W5 Male


COMPLIANT










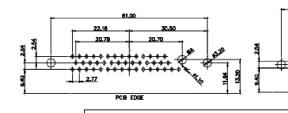

20.7

13.72

PCB EDGE



PCB EDGE

	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 630-9W4	-250-2T6	ISSUE
			PART NUMBER: 630-9W4	-250-2T6	1