



# TYS252012L150M-10

## PHYSICAL DIMENSIONS:



A	2.50	±	0.20
B	2.00	±	0.20
C	1.20	+ / -	0.20 / 0.30
D	0.80	±	0.20
E	0.80	±	0.20

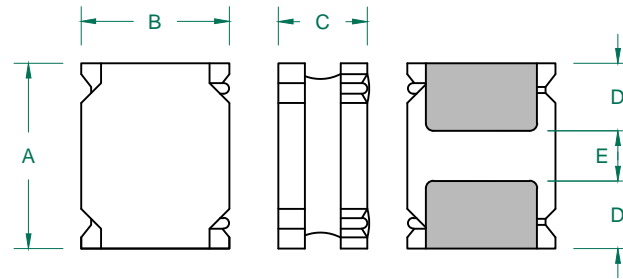

## RECOMMENDED SOLDERING CONDITIONS

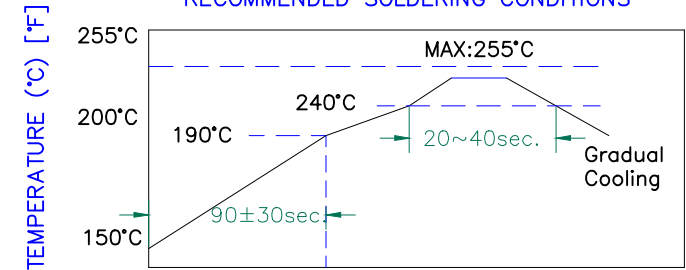

## LAND PATTERNS FOR REFLOW SOLDERING




RoHS

## ELECTRICAL SPECIFICATION


	Min	Typ	Max
INDUCTANCE (uH) L @ 100KHz/1V ±20%	12.0	15.0	18.0
DCR (Ω)			1.469
Saturation Current(A)		0.77	0.68

SRF (MHz)	25
Temperature Rise Current (A)	0.42

## CHARACTERISTICS OF TEMPERATURE RISE

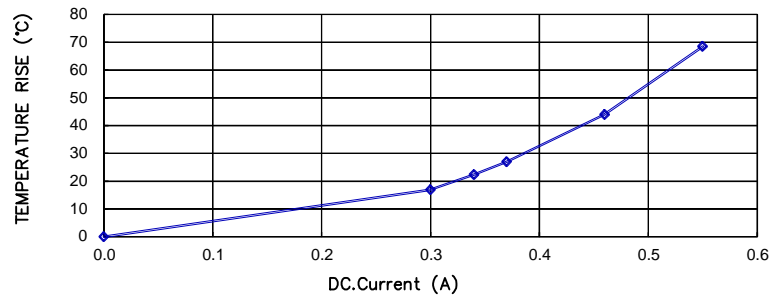

## CURRENT VS INDUCTANCE DROP IN RATES

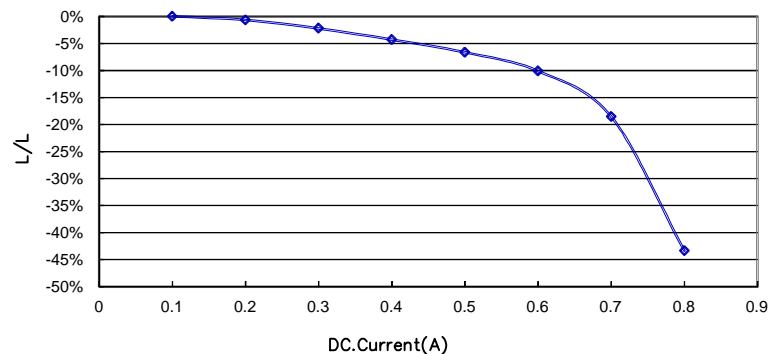

NOTES: UNLESS OTHERWISE SPECIFIED

- OPERATING TEMPERATURE RANGE: -40°C TO +125°C (INCLUDING SELF-HEATING) .
- STORAGE TEMPERATURE RANGE (PACKAGING CONDITIONS): -10°C TO +40°C AND RH 70% (MAX.)
- UNLESS OTHERWISE SPECIFIED, THE STANDARD ATMOSPHERIC CONDITIONS FOR MEASUREMENT/TEST AS:
  - AMBIENT TEMPERATURE: 20±15°C.
  - RELATIVE HUMIDITY: 65%±20%.
- DEFINITION OF SATURATION CURRENT (ISAT): DC CURRENT AT WHICH THE INDUCTANCE DROPS ≤30% FROM ITS VALUE WITHOUT CURRENT.
- DEFINITION OF TEMPERATURE RISE CURRENT (IRMS): DC CURRENT THAT CAUSES THE TEMPERATURE RISE (ΔT ≤40°C) FROM 20°C AMBIENT.

DIMENSIONS ARE IN mm .				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.							
D	CHANGE DIMENSIONS: A/B/C/D/E	01/16/18	QIU	PROJECT/PART NUMBER:	TYS252012L150M-10	REV	D	PART TYPE:	POWER INDUCTOR	DRAWN BY:	QIU
C	CHANGE TEMP. FROM -25°C~+125°C	12/26/12	QIU	DATE:	03/29/12	SCALE:	NTS	SHEET:			
B	ADD CURVE AND SRF	07/06/12	QIU	CAD #		TOOL #	-				
A	ORIGINAL DRAFT	03/29/12	QIU								
REV	DESCRIPTION	DATE	INT		TYS252012L150M-10-D						1 of 1