

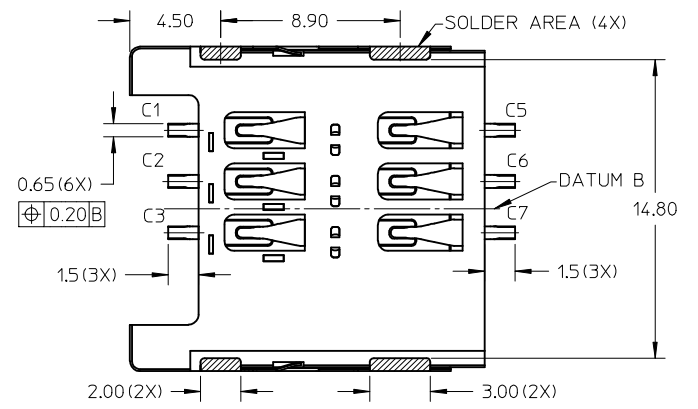
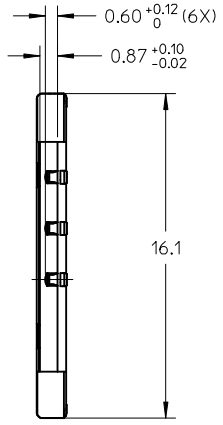




10 9 8 7 6 5 4 3 2 1

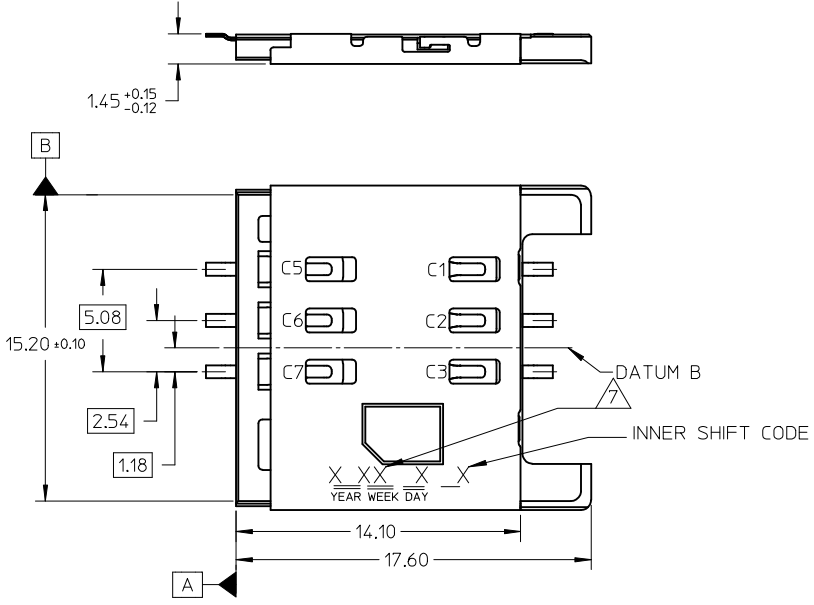

P/N	GOLD PLATING ON CONTACT AREA
1050480011	0.50um (20u") MIN
1050480001	0.375um (15u") MIN



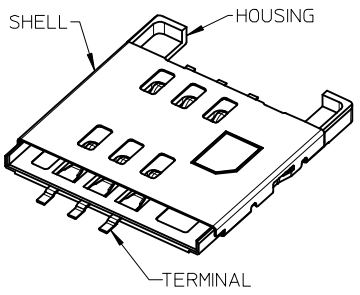


NOTE:
 1 MATERIAL
 HOUSING : LIQUID CRYSTALLINE POLYMER (LCP), GLASS FILLED
 UL94V-0, COLOR: BLACK
 TERMINAL : PHOSPHOR BRONZE
 SHELL : STAINLESS STEEL
 2 FINISHES
 TERMINAL : 0.375um (15u") MIN GOLD ON CONTACT AREA
 0.0762 - 0.127um (3 - 5u") GOLD FLASH ON SOLDER TAILS
 1.27um (50u") MIN NICKEL UNDERPLATE OVER ALL
 SHELL : 0.0762um (3u") MIN GOLD FLASH OVER 1.27um (50u") MIN
 NICKEL UNDERPLATE ON SOLDER AREAS
 3 PRODUCT SPECIFICATION: PS-105048-001
 4 PACKAGING SPECIFICATION: PK-105048-001
 5 ALL SOLDER TAILS COPLANARITY: 0.08mm MAX
 6 COMPLIANT TO ROHS DIRECTIVE 2002/95/EC & ELV DIRECTIVE 2000/53/EC
 7 DATE CODE *** (4 DIGITS)

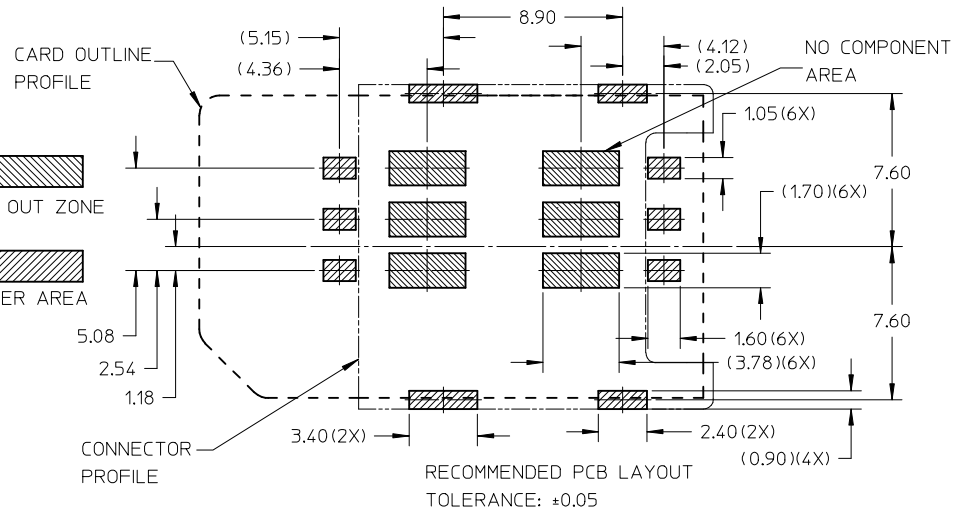


ADD P/N: 1050480001	EC NO: S2012-0681	DRWN: JZENG	CHKD: JTAN02	APPR: KHL IM	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
								mm	INCH	MM ONLY	NTS	METRIC	TITLE	DOCUMENT NO.	SHEET NO.
4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.15 ± --- 1 PLACE ± 0.2 ± --- ANGULAR ± 3 °								DRAWN BY		DATE		molex MOLEX INCORPORATED SD-105048-011		1 OF 1	
								CHECKED BY		DATE					
								APPROVED BY		DATE					
								MATERIAL NO.		DATE					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					



9 8 7 6 5 4 3 2 1

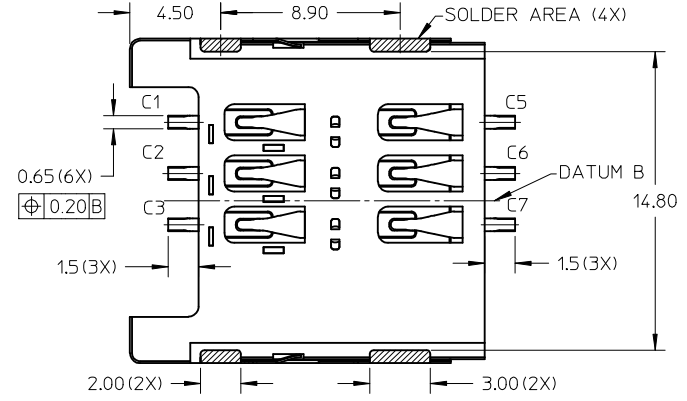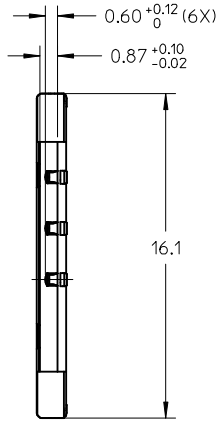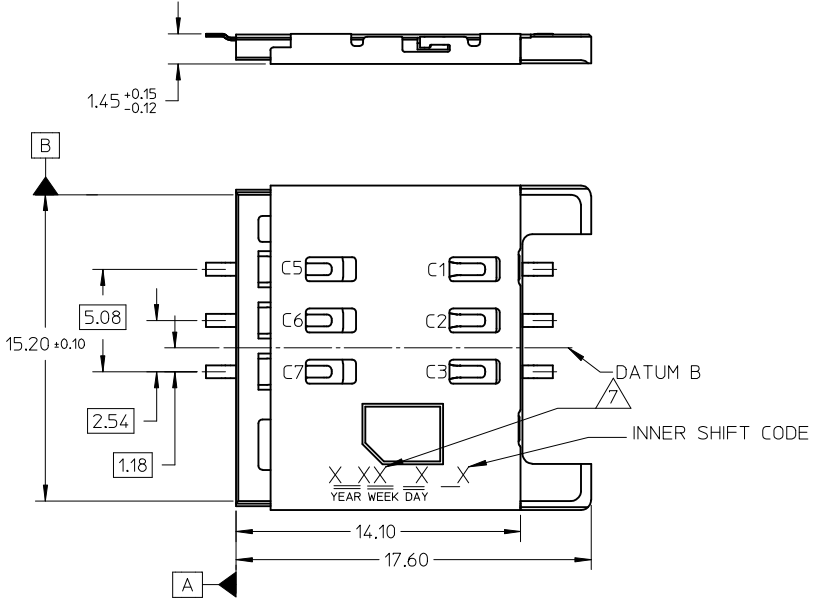

P/N	GOLD PLATING ON CONTACT AREA
1050480011	0.50um (20u") MIN
1050480001	0.375um (15u") MIN

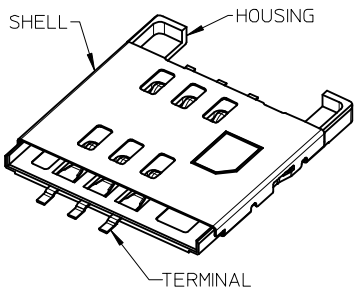

NOTE:
 1 MATERIAL
 HOUSING : LIQUID CRYSTALLINE POLYMER (LCP), GLASS FILLED UL94V-0, COLOR: BLACK
 TERMINAL : PHOSPHOR BRONZE
 SHELL : STAINLESS STEEL
 2 FINISHES
 TERMINAL : 0.375um (15u") MIN GOLD ON CONTACT AREA
 0.0762 - 0.127um (3 - 5u") GOLD FLASH ON SOLDER TAILS
 1.27um (50u") MIN NICKEL UNDERPLATE OVER ALL
 SHELL : 0.0762um (3u") MIN GOLD FLASH OVER 1.27um (50u") MIN NICKEL UNDERPLATE ON SOLDER AREAS
 3 PRODUCT SPECIFICATION: PS-105048-001
 4 PACKAGING SPECIFICATION: PK-105048-001
 5 ALL SOLDER TAILS COPLANARITY: 0.08mm MAX
 6 COMPLIANT TO ROHS DIRECTIVE 2002/95/EC & ELV DIRECTIVE 2000/53/EC
 7 DATE CODE *** (4 DIGITS)

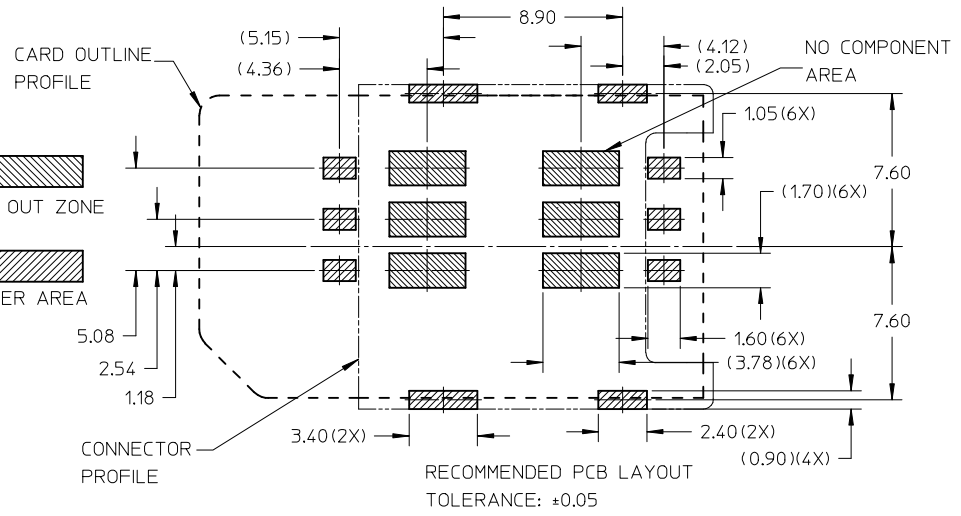

REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			mm	INCH	MM ONLY	DATE				
A2	ADD P/N: 1050480001 EC NO: S2012-0681 DRWN: JZENG CHKD: JTAN02 APPR: KHL IM	$F_A=0$ $F_C=0$ $F_P=0$	4 PLACES	\pm ---	\pm ---	JZENG	2011/02/21	NTS	METRIC	SIM CONNECTOR 6PIN WITH GUIDE RAIL 1.45MM HEIGHT MOLEX INCORPORATED
			3 PLACES	\pm ---	\pm ---	CHECKED BY	DATE			
			2 PLACES	\pm 0.15	\pm ---	JTAN02	2011/03/07			SD-105048-011
			1 PLACE	\pm 0.2	\pm ---	APPROVED BY	DATE			SHEET NO.
			ANGULAR \pm 3°			KHL IM	2011/03/07			1 OF 1
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
					A3					