


COIL:

RESISTANCE 700 Ω ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.5 VDC

CUSTOMER DATA SHEET

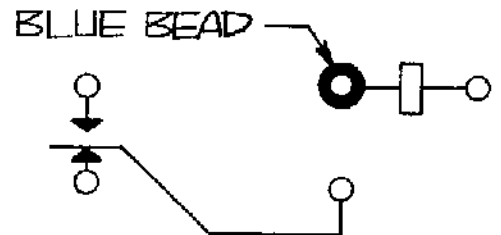

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 5 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 10 AMP/28 VDC
RESISTIVE 50,000 OPERATIONS

NOTES: DIELECTRIC-1000 VRMS EXCEPT
500 VRMS ACROSS OPEN CONTACTS

DR. R.B. 1-30-91 CK.1/50/913MB

Communications Instruments, Inc.

CUST. C.I.I. STD
 CUST. NO. _____

TYPE "C" RELAY

CEW-1C-24A