

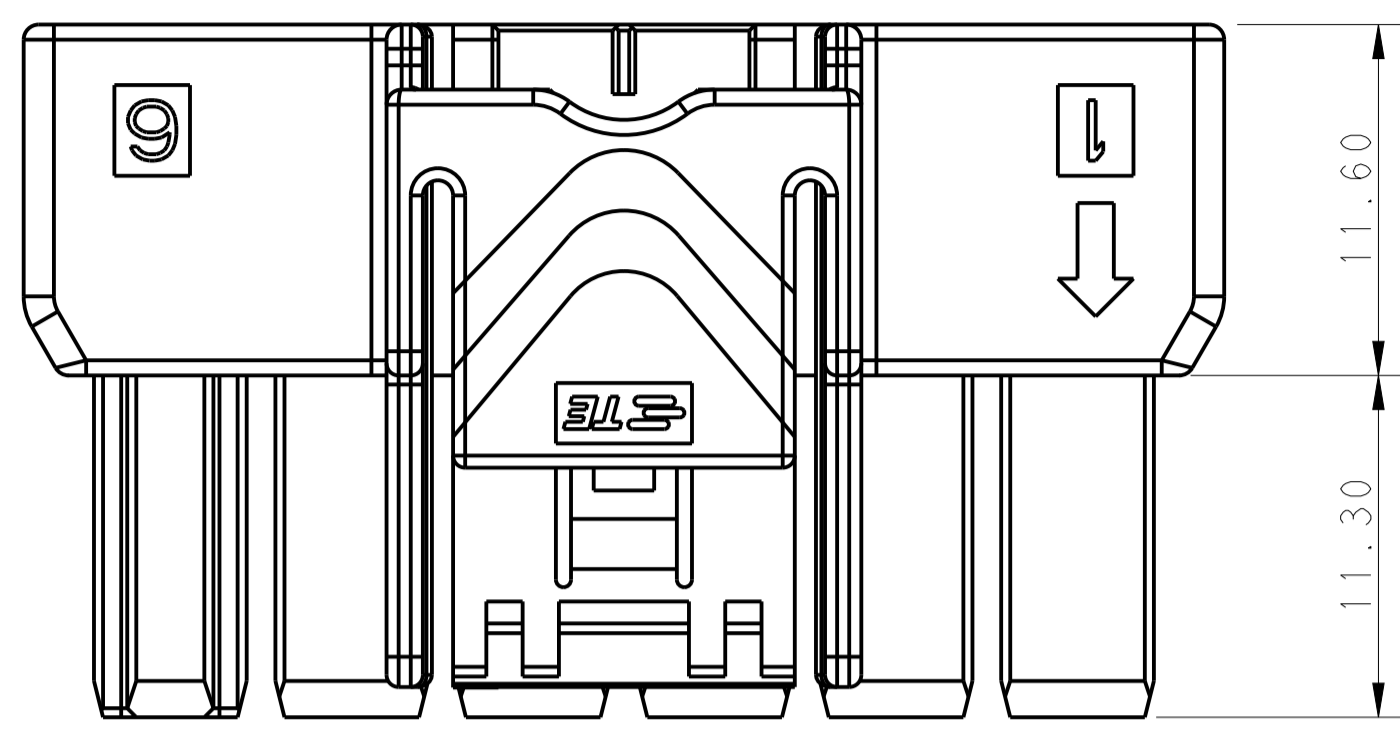
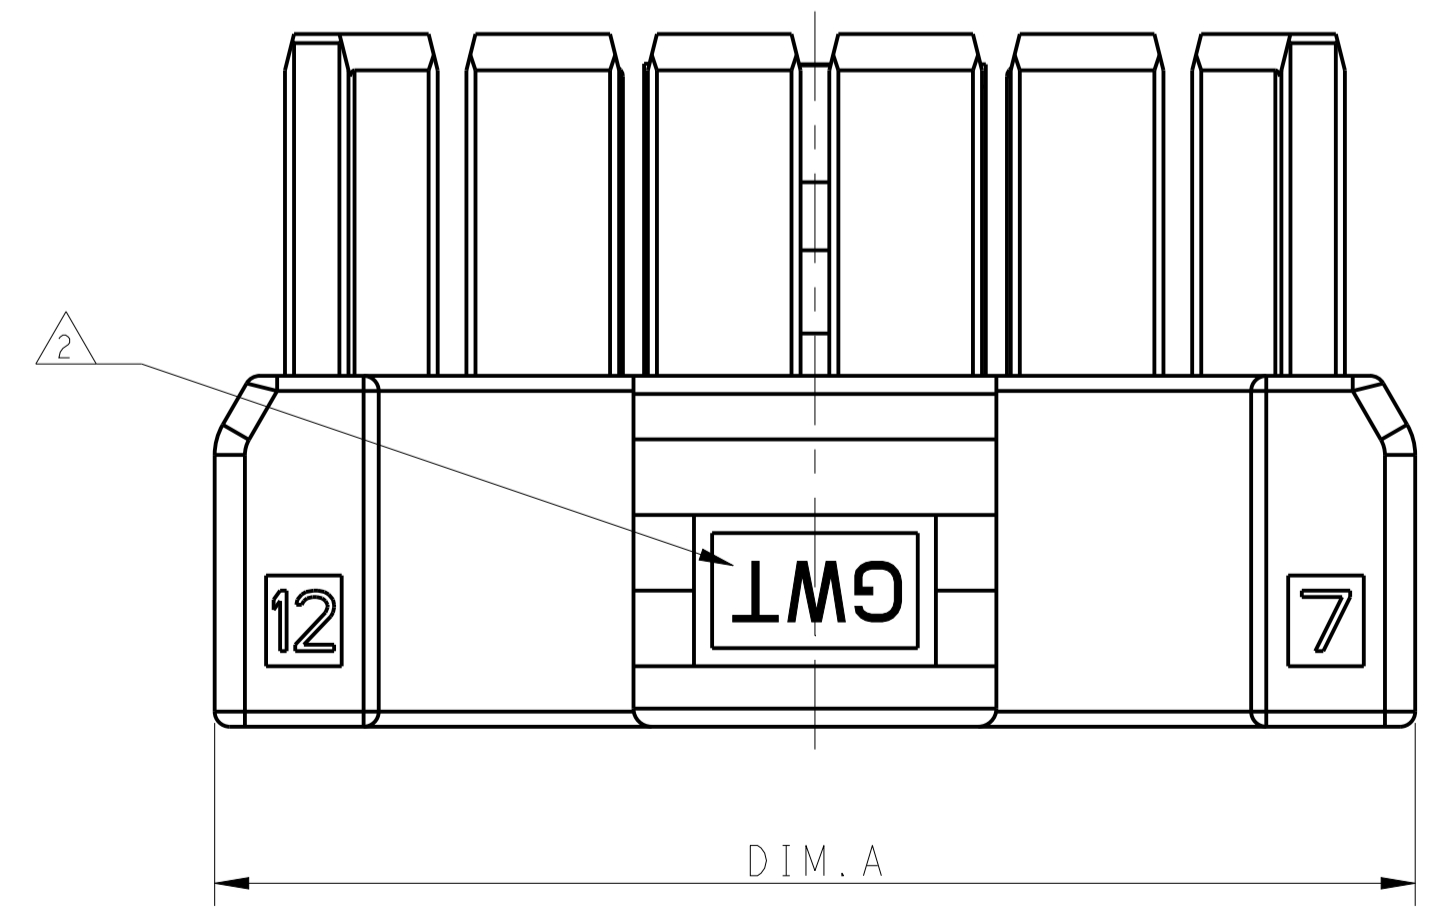
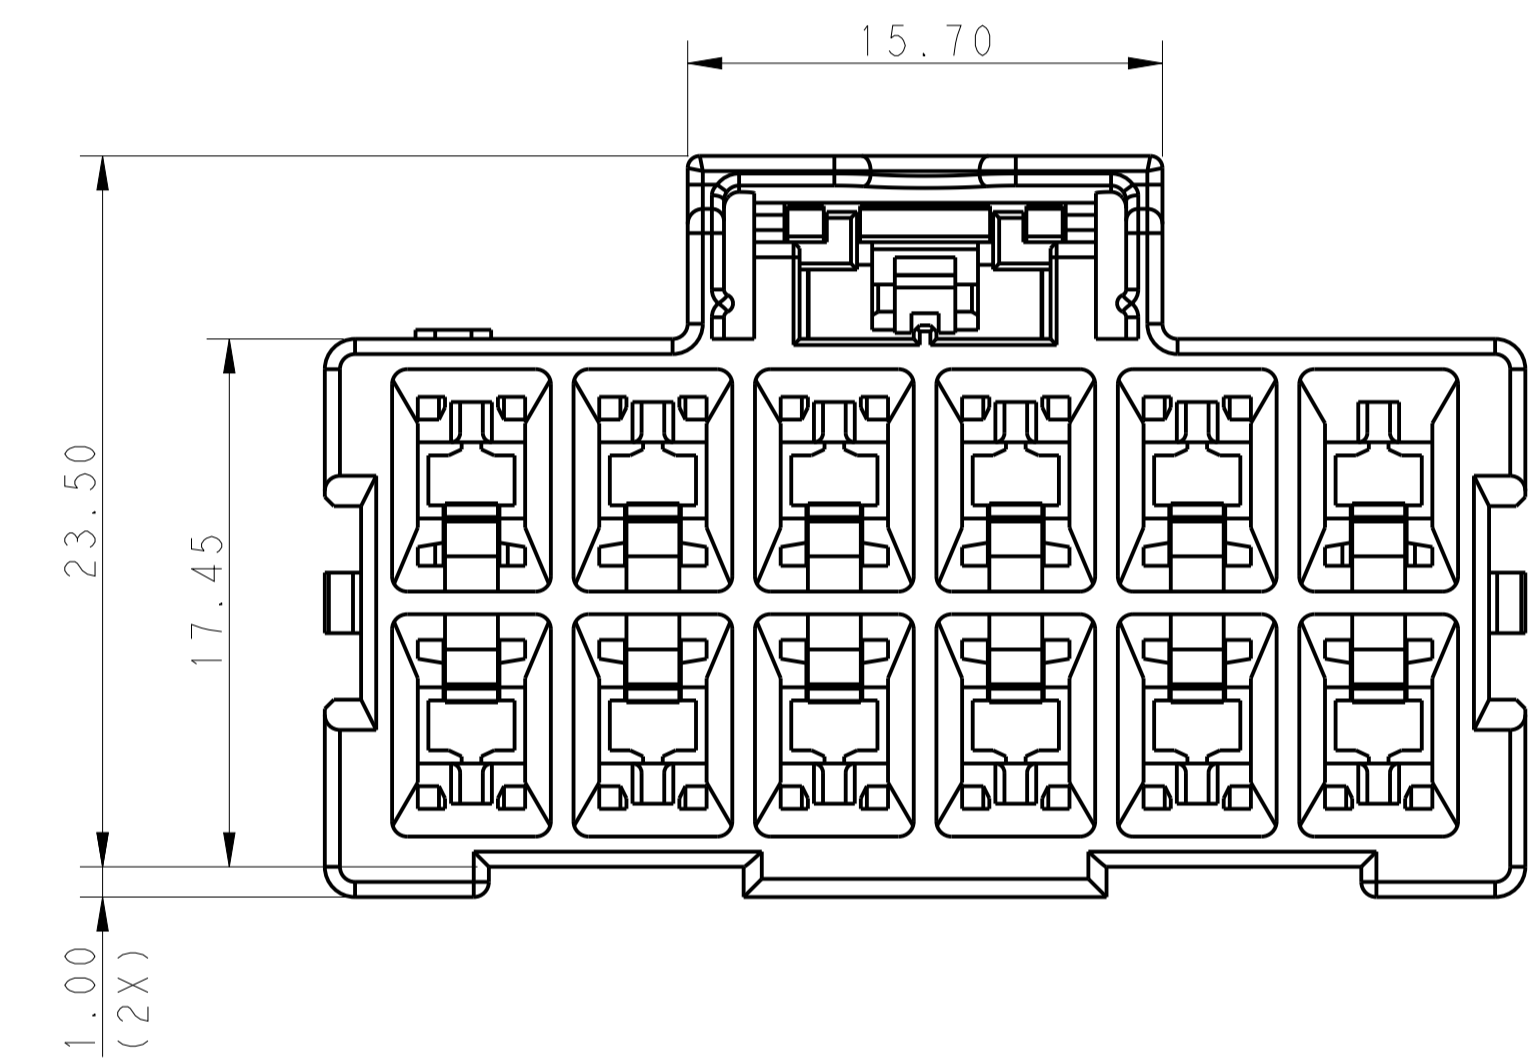


REVISONS		DATE	DWN	APVD
P	LTM			
C		08APR2021	SS	VS

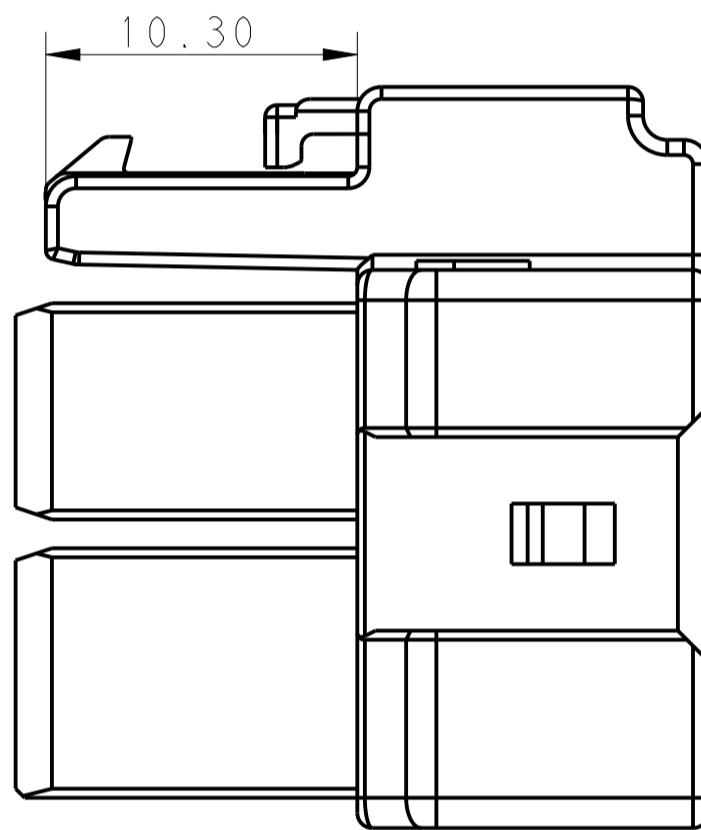

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

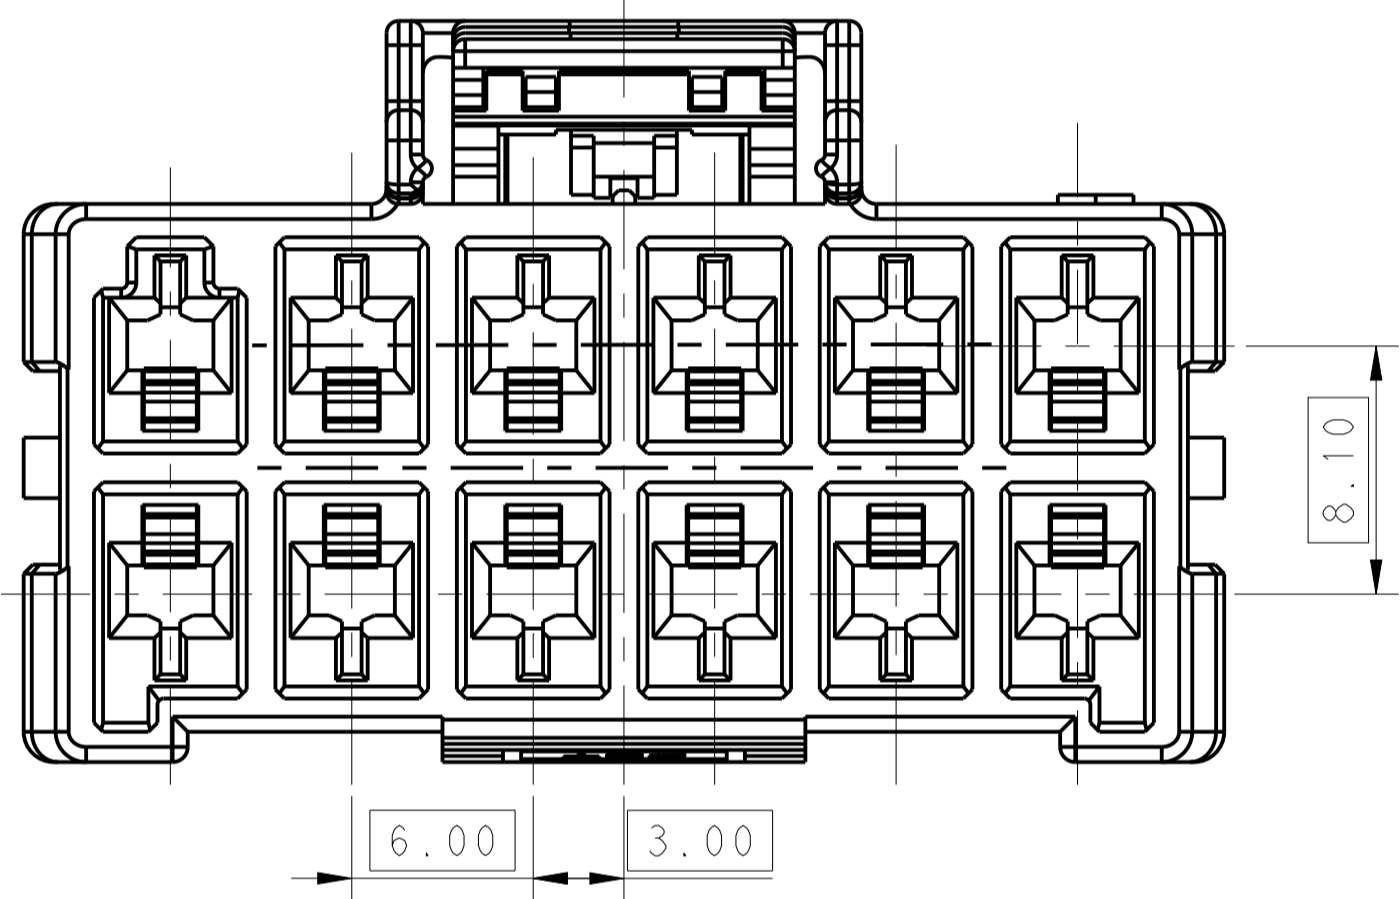

NOTE
 1. MATERIAL:
 LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
 LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE PENDING HOT WIRE IGNITION TEST AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0



△. MATERIAL MARK:
 LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N
 RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*,2238066-*



4. MATING CONN, P/N
 CAP HSG: *-2232359/264-
 TPA: *-1971778-*

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: TOMMY WU 26MAR2013	TE Connectivity
DIMENSIONS: mm		CHK: HAPYE WU 26MAR2013	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: YIHONG MAO 26MAR2013	NAME: PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK
0 PLC	±	PRODUCT SPEC	SIZE: A1
1 PLC	±0.35	108-106118	CAGE CODE: 2232266
2 PLC	±0.25	APPLICATION SPEC	RESTRICTED TO
3 PLC	±	114-106118	SCALE: - SHEET 1 OF 2 REV C
4 PLC	±	WEIGHT: -	
ANGLES	±	MATERIAL: -	
FINISH	-	Customer Drawing	



REV. NO.		REVISIONS			
LOC.	DIST.	DATE	DESCRIPTION	DATE	APP'D.
-	-	-	SEE SHEET 1	-	-

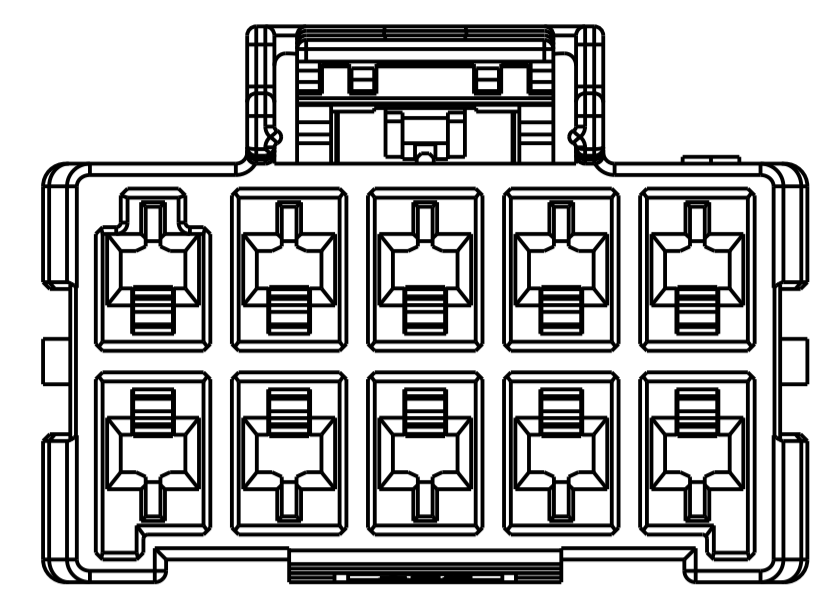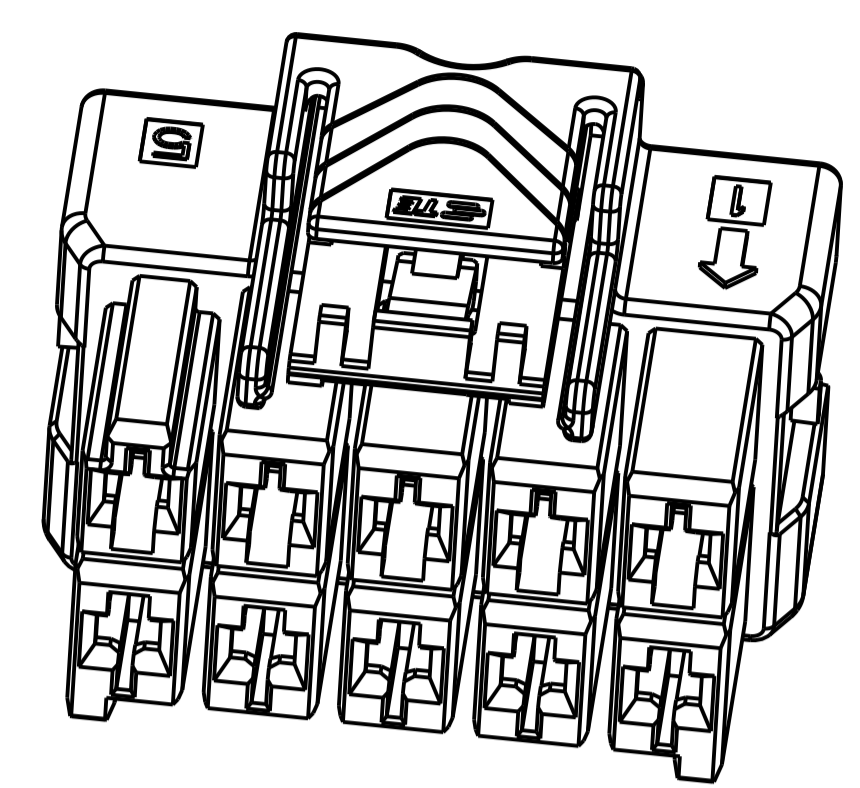


2*5 POSITIONS

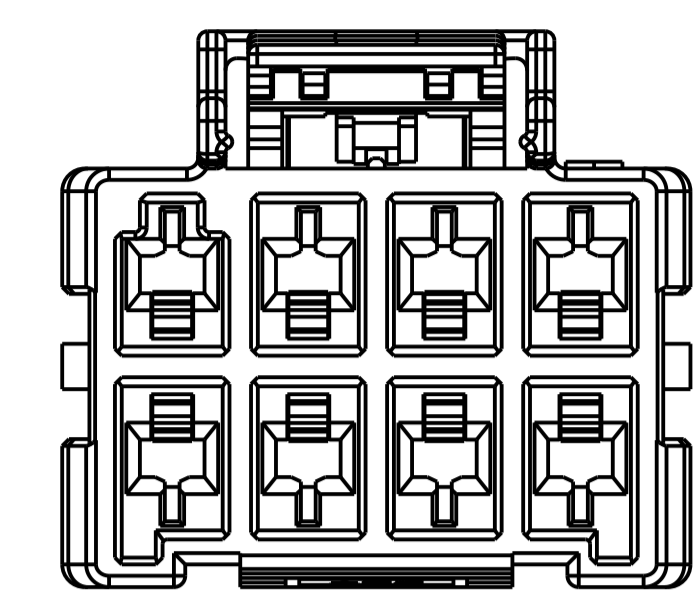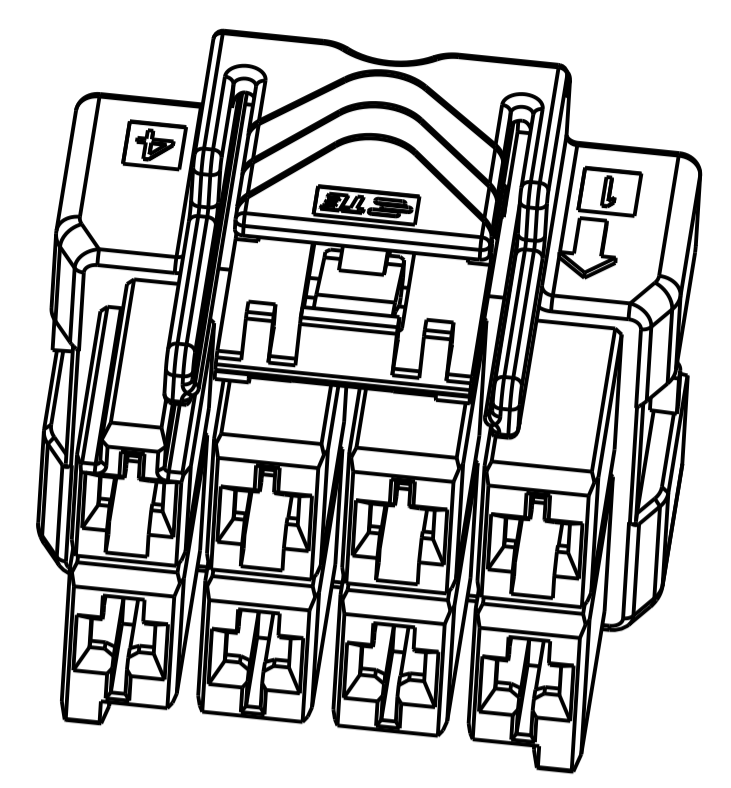


2*4 POSITIONS

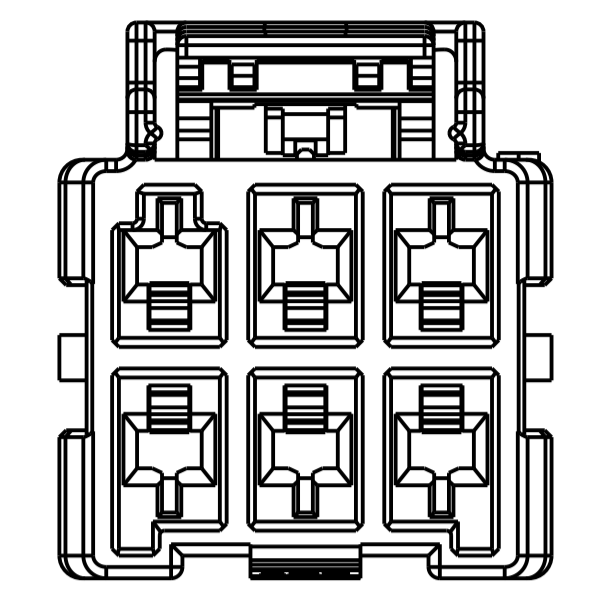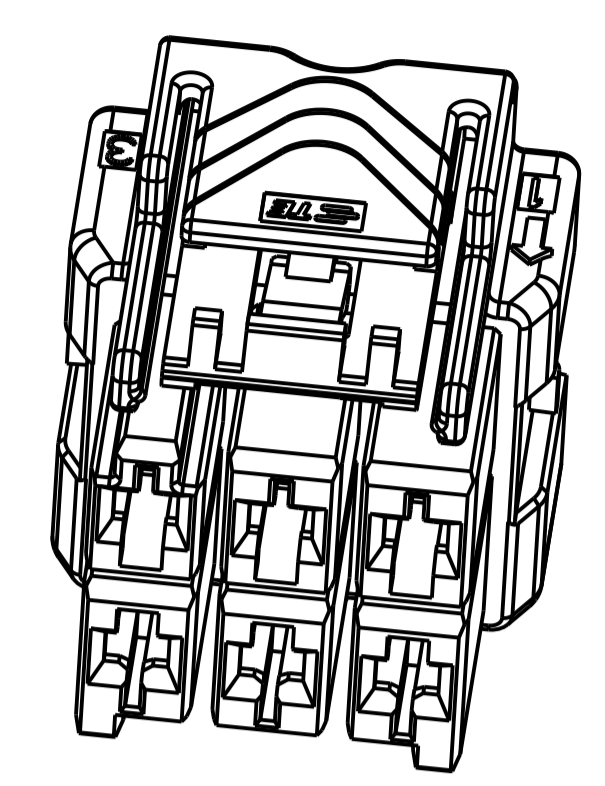


2*3 POSITIONS

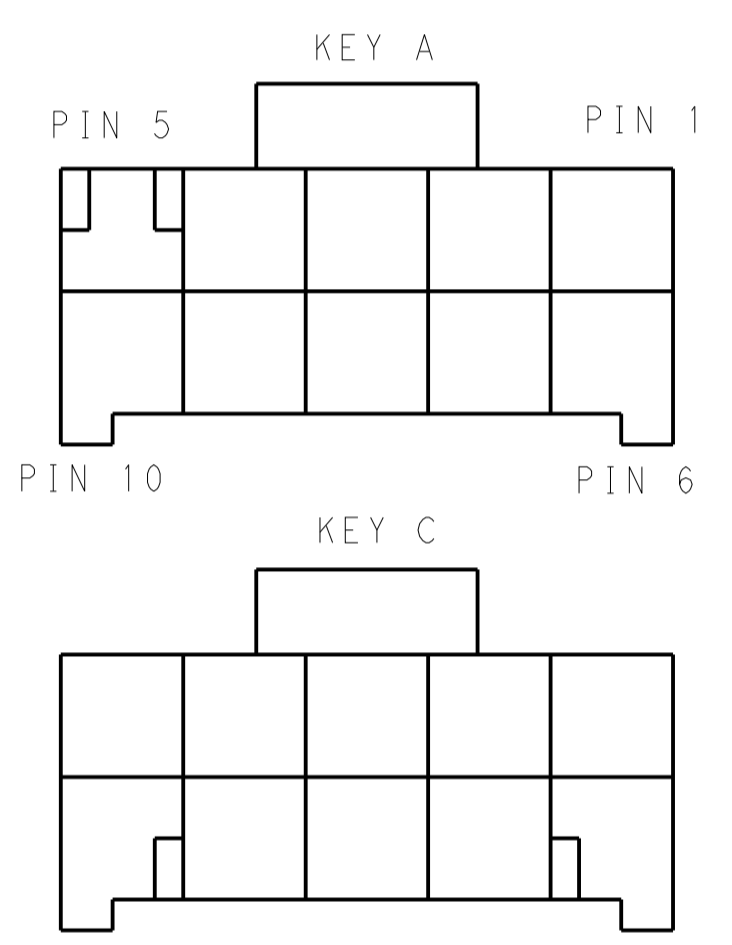



KEYING FOR 2*5 POS.

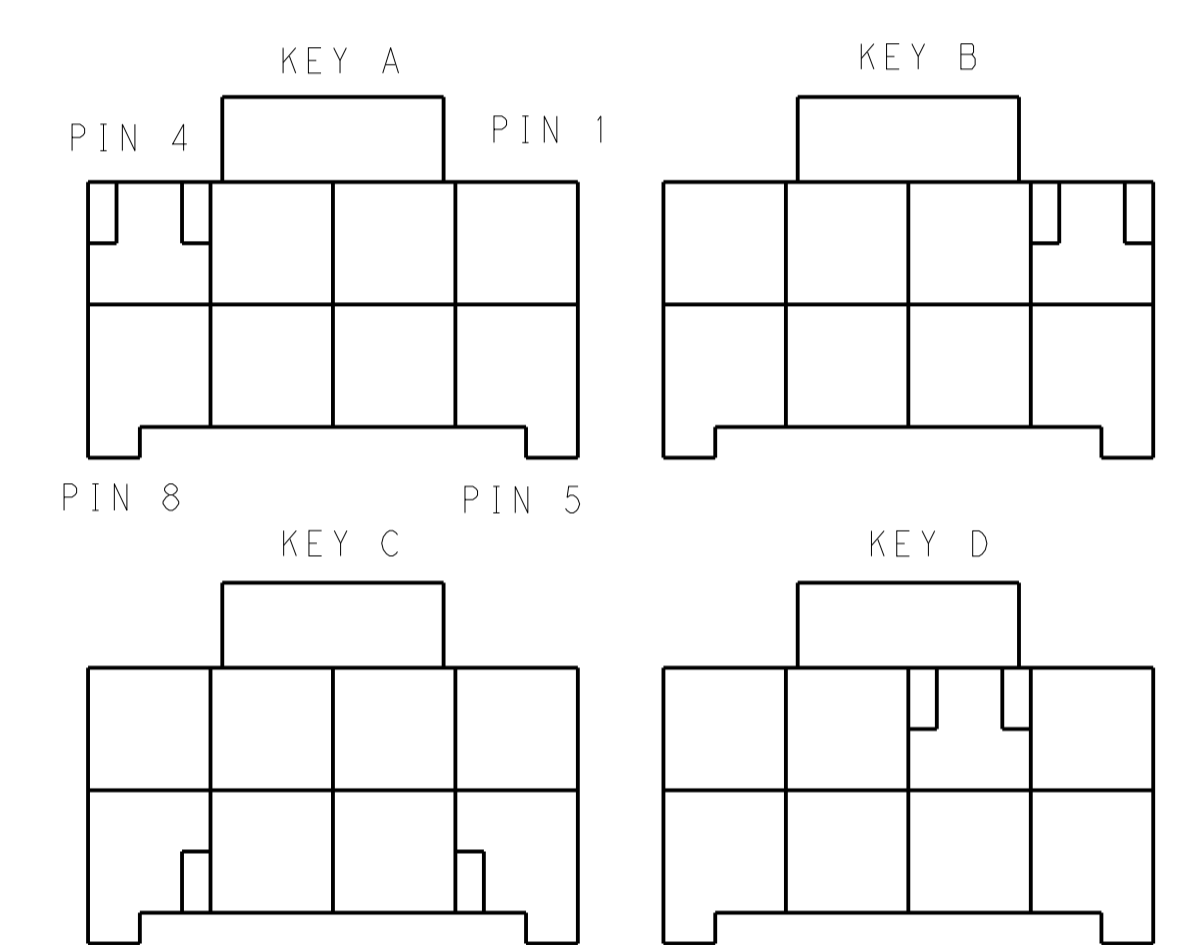


KEYING FOR 2*4 POS.

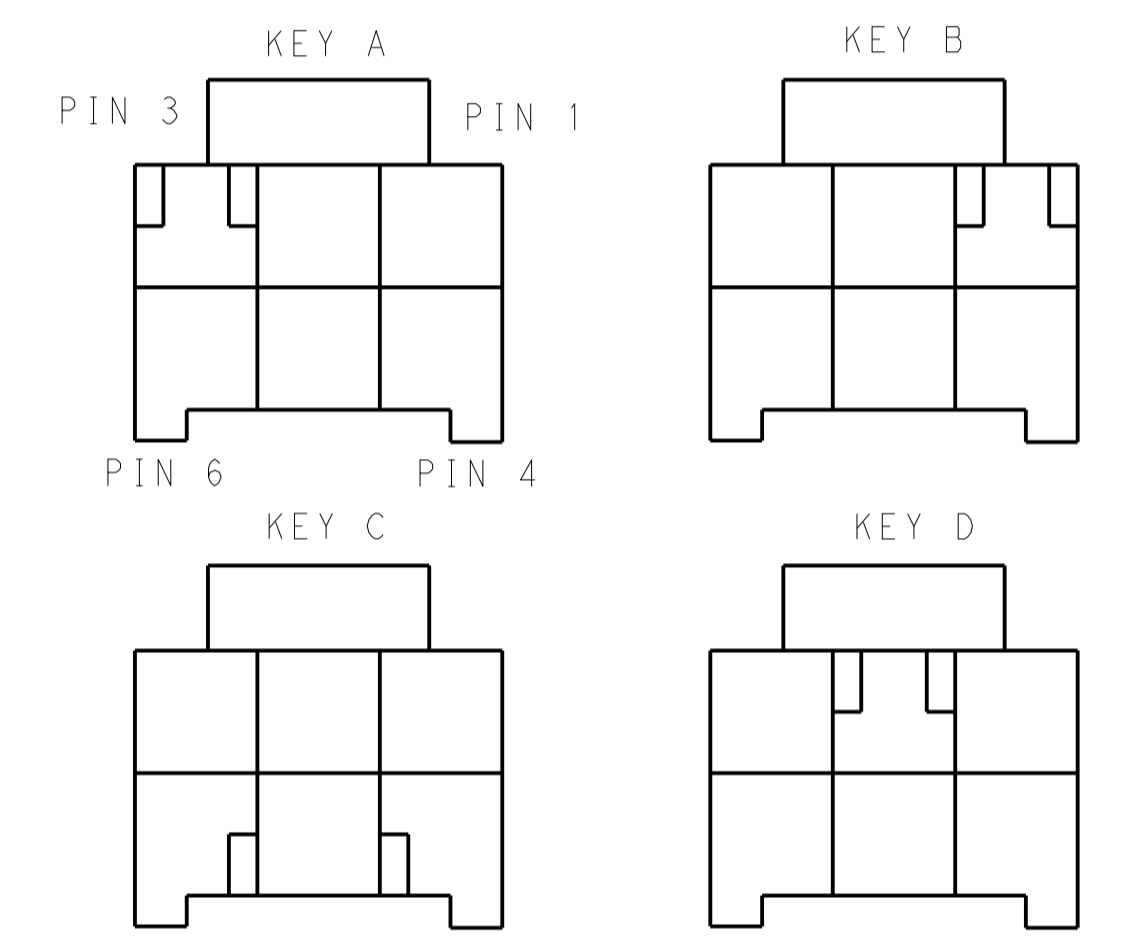

KEYING FOR 2*3 POS.

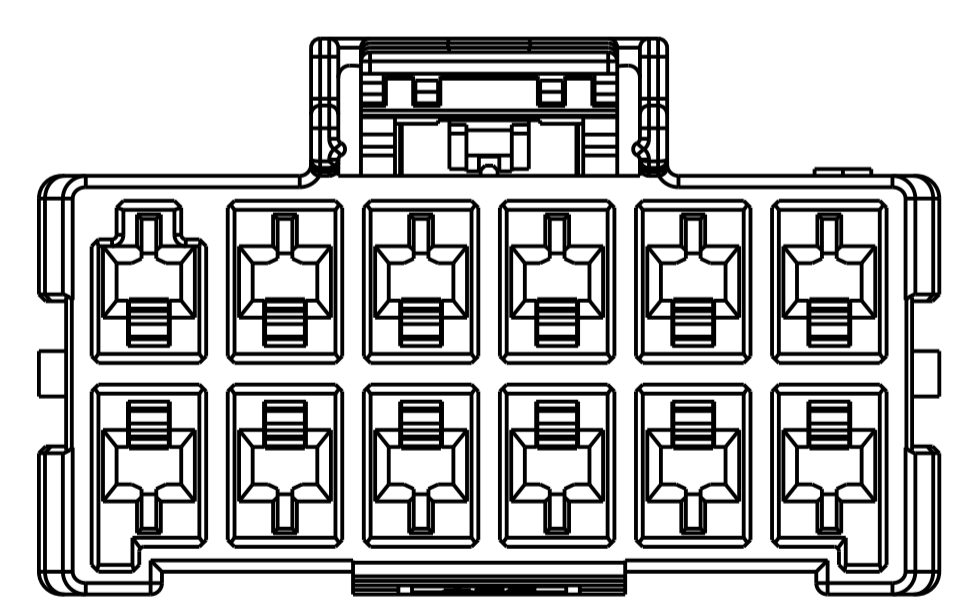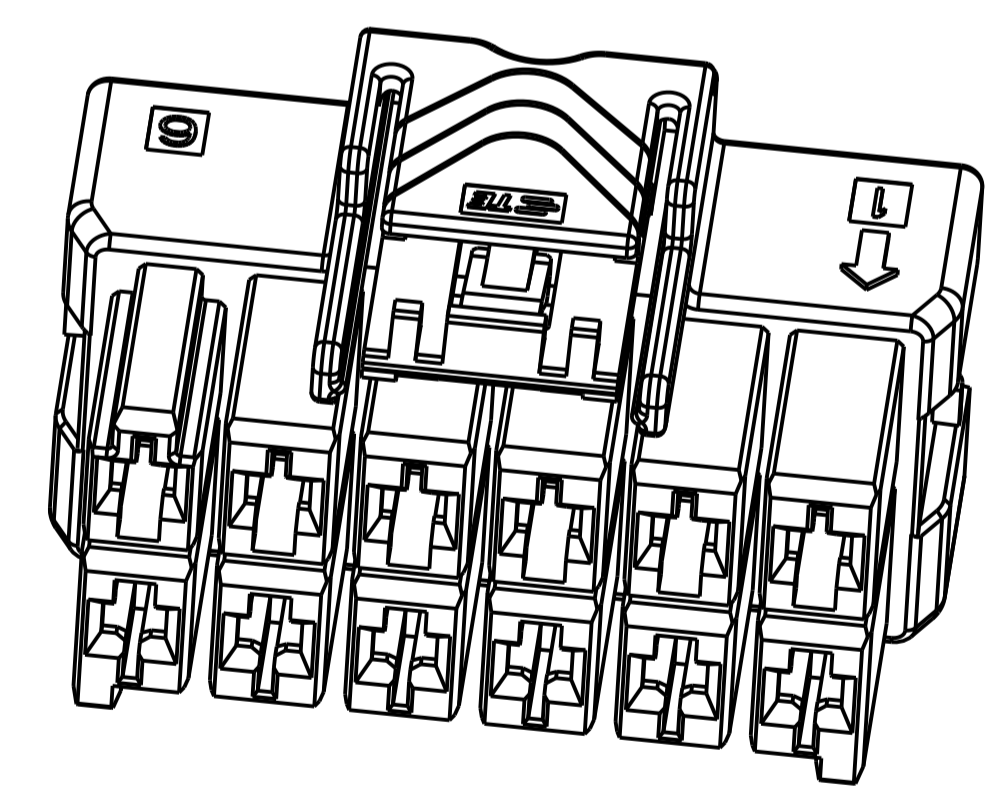

2*6 POSITIONS

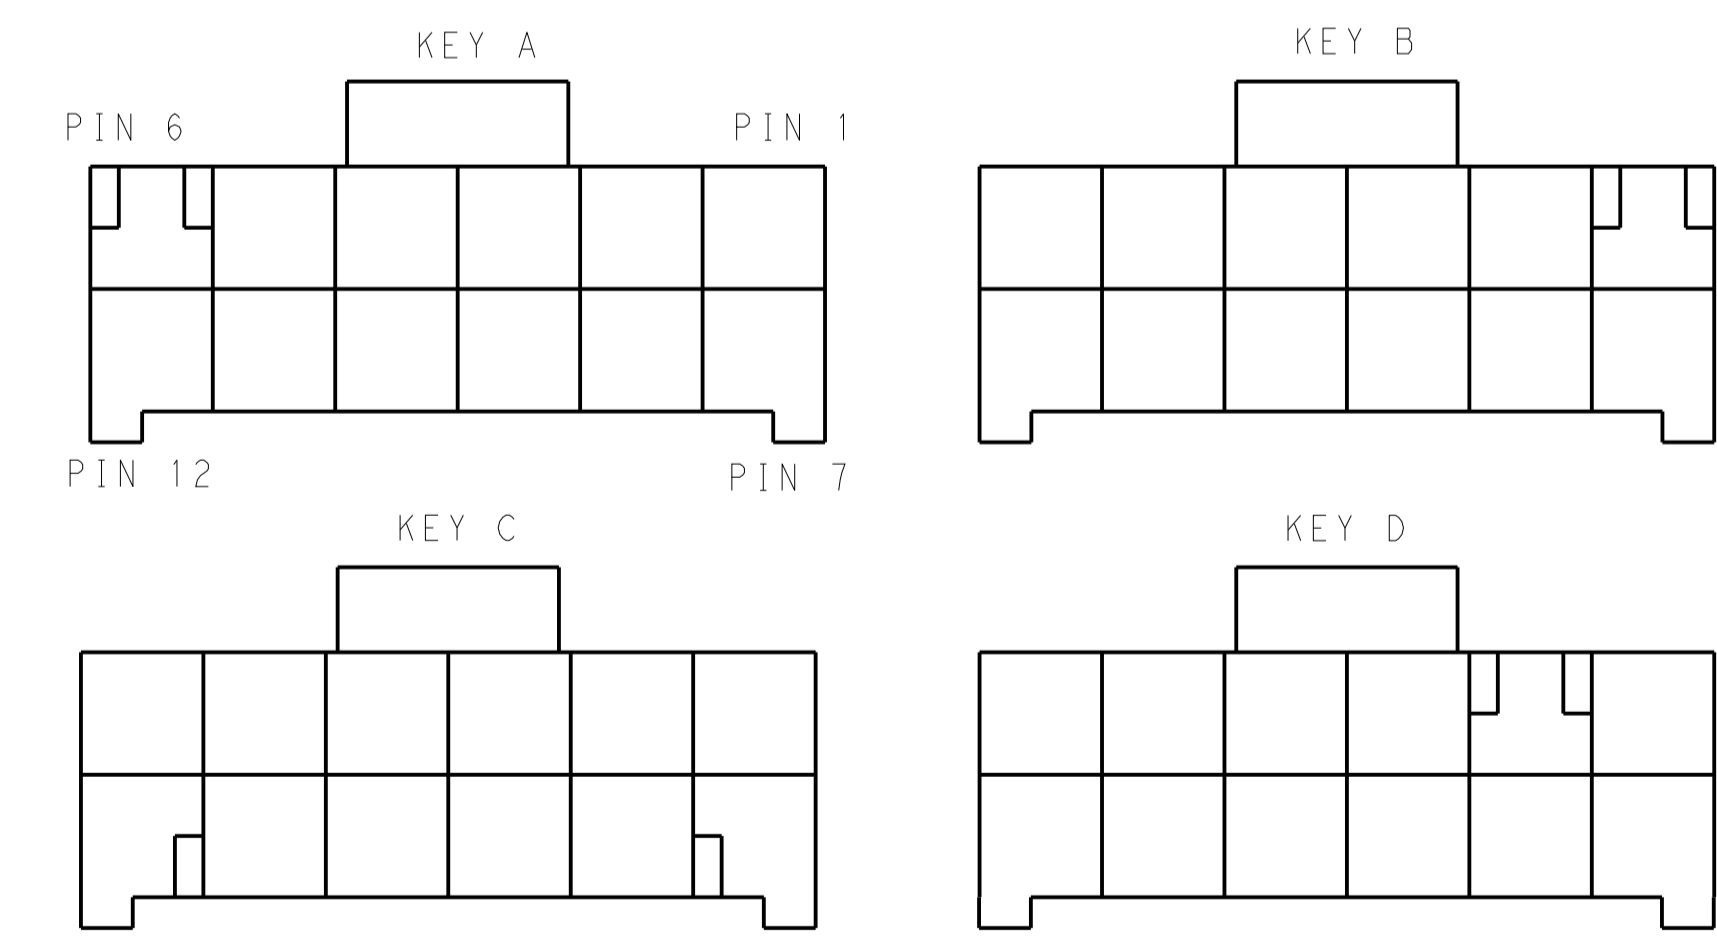

KEYING FOR 2*6 POS.

POS.	MATERIAL	COLOR	KEY	P/N
2*6	LEVEL A	DARK GREY	KEY A	5-2232266-4
		BROWN	KEY B	6-2232266-6
		GREEN	KEY C	7-2232266-6
		ORANGE	KEY D	8-2232266-6
2*5	LEVEL A	DARK GREY	KEY A	5-2232266-5
		BROWN	KEY B	6-2232266-5
		GREEN	KEY C	7-2232266-5
		ORANGE	KEY D	8-2232266-5

POS.	MATERIAL	COLOR	KEY	P/N
2*4	LEVEL A	DARK GREY	KEY A	5-2232266-4
		BROWN	KEY B	6-2232266-4
		GREEN	KEY C	7-2232266-4
		ORANGE	KEY D	8-2232266-4
2*3	LEVEL A	BLACK	KEY A	1-2232266-4
		DARK GREY	KEY A	5-2232266-3
		BROWN	KEY B	6-2232266-3
		GREEN	KEY C	7-2232266-3
2*3	LEVEL B	ORANGE	KEY D	8-2232266-3
		BLACK	KEY A	1-2232266-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
 0 PLC ±0.35
 1 PLC ±0.25
 2 PLC ±0.25
 3 PLC ±0.25
 4 PLC ±0.25
 ANGLES ±0.5

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS: mm
 0 PLC ±0.35
 1 PLC ±0.25
 2 PLC ±0.25
 3 PLC ±0.25
 4 PLC ±0.25
 ANGLES ±0.5

DWG: TOMMY_WU 26MAR2013
 CHK: HAPYE_WU 26MAR2013
 APVD: YIYHONG_MAO 26MAR2013

STE TE Connectivity
 NAME: PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK
 PRODUCT SPEC: 108-106118
 APPLICATION SPEC: 114-106118
 SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: C=2232266
 WEIGHT: -
 Customer Drawing

SHEET 2 OF 2
 REV C