

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	(1)

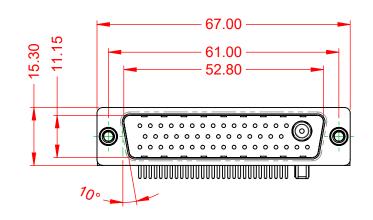




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

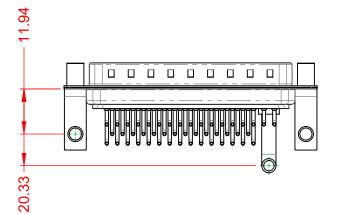

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05

				SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
o	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
ES CY.	TORONTO, ONTARIO CANADA	CANADA OR USED AS THE BASIS FOR THE DRAWING NUMBER: 029-2	DRAWING NUMBER: 629-47W	1650-4NE	ISSUE	
51.	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-47W	1650-4NE	1	

1000V AC rms

то

THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY

COMPLIANT

