

I I I I I I I I I I I I I I I I I I I	G	нт. П	m	0



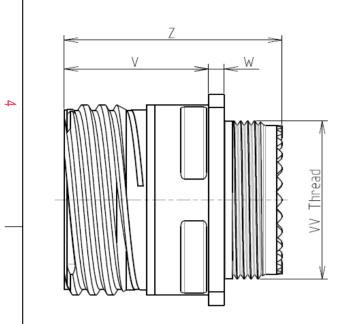

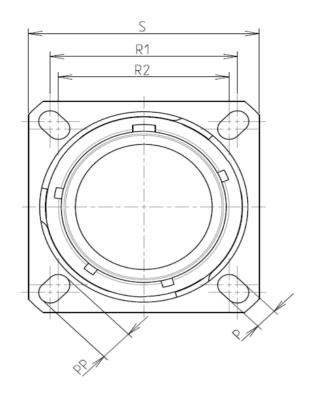

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered without Souriau contacts					
-Temperature Range	<sub>:</sub> -65°C to +175°C				
-Salt Spray	: 500 hours				

: 14.72 g ± 10%

8D 0

G

13

Ζ

26


Ρ


F

А L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е

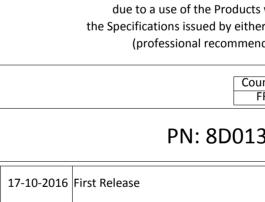

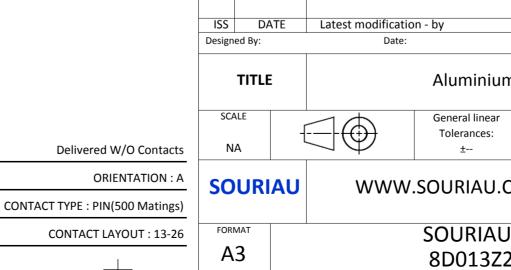

А

D

SHELL SIZE : 13					
PLATING	: Z =	Black Zinc Nickel			

Н

CONTACT TYPE : Standard Crimp Contact

SHELL TYPE : Square Flange Receptacle

0		Φ		A		
						4
LAY	OUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						2
PN: 8D013Z26PAL						
rst Release MOD N° Latest modification - by MOD N° Date: CUSTOMER DRAWING						
Aluminium Receptacle 8D series						
$] \bigoplus$	General linear Tolerances: ±		NPRDS / PI <b>859</b>	)		1
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
SOURIAU DRG N° 8D013Z26PAL-C			SHEET 1/2			
С		B		A		J

_	т	G	п П	m	D	0
		Contact Layout				Panel Cutou
4	(	26			- R	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_	<b></b>	6#22D			y	
ω	Ctc A B C D E F 1 2	13-26         X       Y         0       3.47         2.47       4.34         2.47       -4.34         0       -3.47         -2.47       -4.34         -2.47       4.34         3.25       0         -3.25       0				Dim ØA ØAA R1 ØT
	_					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D013Z
_					A 17-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date: Aluminium
-					SCALE	General linear Tolerances: ±
					SOURIAU	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013Z2
L	Η	G	F	E	D	С

