
ت <u>ت</u>	тт	т		0	σ	A	
	ØS				OWN AS EXAMPLE		
	Keying Shown as ex			LATOUT SH	OWN AS EXAMPLE		
<ul> <li>CHARACTERISTICS</li> <li>-Standard : Based on MIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Olive drab Cadmium</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> <li>-Temperature Range : -65°C to +175°C</li> <li>-Salt Spray : 2000 hours</li> <li>-Mass : 9.8 g ± 10%</li> </ul>		DimNominalØS21.8Z'31.5MaxVM12x1-6g	A 14-10-2016 ISS DATE Designed By:	due to a use of the Pr the Specifications issued b (professional reco PN: 8 First Release Latest modification - by Date:	BD509J98SB	nply with y a third party tice.) ction & Control List Not Listed CUSTOMER DRAWING	MOD N°
BASIC SERIES: 8D 5 - 09 J SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 09	J 98 S B	ORIENTATION : CONTACT TYPE : SOCKET(500 Matings CONTACT LAYOUT : 09-9		Gene Tole	Composite Plug 8E eral linear erances: ± RIAU.COM JRIAU DRG N°	D Series NPRDS / PROJECT 859 This document is the prope SOURIAU it must not be reproduce communicated without perr	d or

r	Ŧ	۵	н <b>г</b>	m	U	0
		Contact Layout				
4	-X	$ \begin{array}{c}                                     $				
	Shell Arrangement Numb size no. conta 9 -98 3	+ 065 (1.65) + 038 (0.97) + 000 (0.00) - 075 (1.91) - 065 (1.65) + 038 (0.97) - 065 (1.65) + 038 (0.97) - 065 (1.65) + 038 (0.97)				
ω						
	L					
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend
N						PN: 8D50
					A 14-10-20 ISS DATE Designed By:	16 First Release
					TITLE	Comp
-					SCALE NA	General linear Tolerances:
					SOURIA	
				_	FORMAT A3	SOURIAI 8D509.
l	Н	G	F	E	D	C

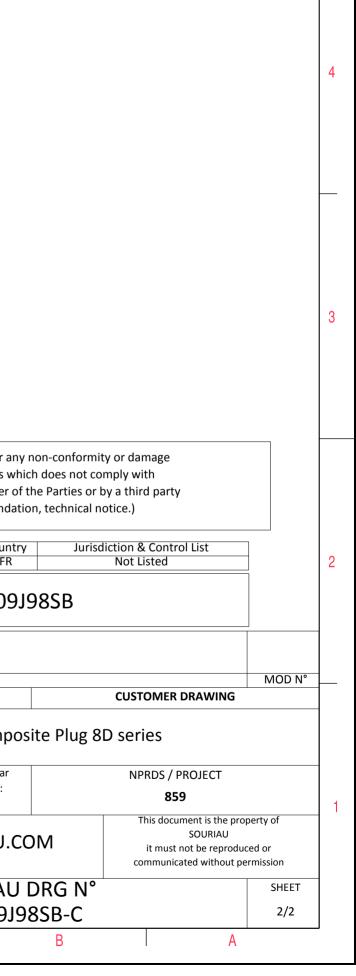

 $\triangleright$ 

σ