

Feed-through header - GMSTBA 2,5 HC/ 2-G-7,62 BK - 1813321

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 16 A, number of positions: 2, pitch: 7.62 mm, color: black, contact surface: Tin, mounting: Wave soldering




The figure shows the 5-position version of the product

Your advantages

- Well-known mounting principle allows worldwide use

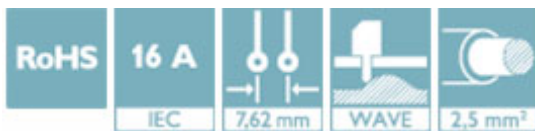

Key Commercial Data

Packing unit	50 pc
GTIN	 4 046356 730938
GTIN	4046356730938

Technical data

Dimensions

Length [l]	12 mm
Width	15.24 mm
Pitch	7.62 mm
Dimension a	7.62 mm
Width [w]	15.24 mm
Height [h]	12.1 mm
Height	8.6 mm
Length of the solder pin	3.5 mm
Pin dimensions	1 x 1 mm
Length	12 mm

General

Range of articles	GMSTBA 2,5 HC/...-G
Rated voltage (III/3)	500 V

Feed-through header - GMSTBA 2,5 HC/ 2-G-7,62 BK - 1813321

Technical data

General

Connection in acc. with standard	EN-VDE
Nominal current I_N	16 A
Color	black
Number of positions	2

Standards and Regulations


Connection in acc. with standard	EN-VDE
	CUL

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Diagram

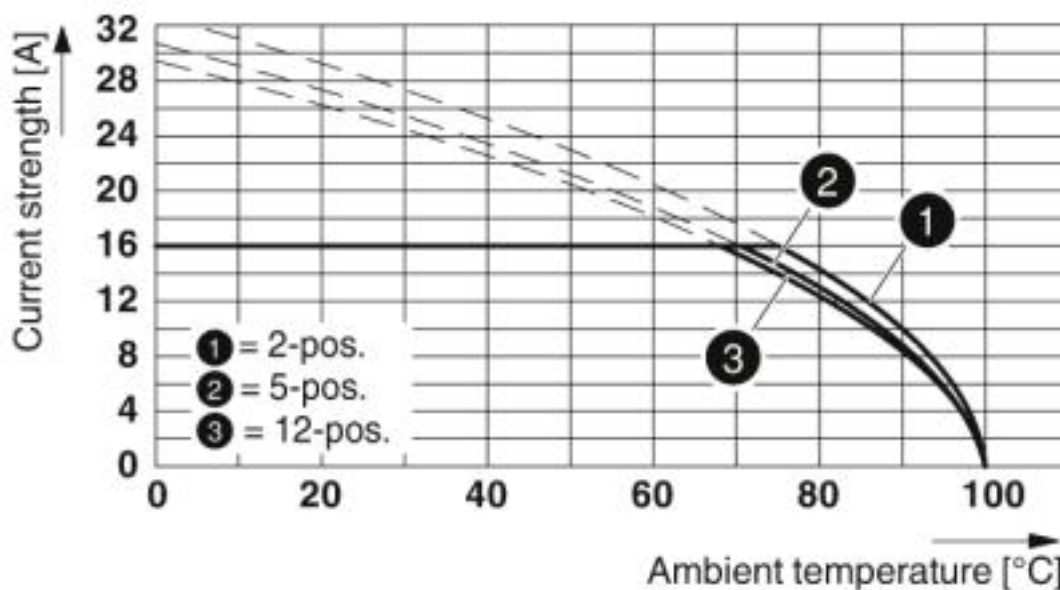

Type: GMSTB 2,5 HCV/...-ST-7,62 with GMSTBA 2,5 HC/...-G-7,62

Approvals

Approvals

Approvals


EAC / cULus Recognized / IECCE CB Scheme / VDE Zeichengenehmigung


Feed-through header - GMSTBA 2,5 HC/ 2-G-7,62 BK - 1813321


Approvals


Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-19931013
	B	D	
Nominal voltage UN	300 V	300 V	
Nominal current IN	20 A	10 A	

IECEE CB Scheme		http://www.iecee.org/	DE1-60988-B1B2
Nominal voltage UN	400 V		
Nominal current IN	16 A		

VDE Zeichengenehmigung		http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40050079
Nominal voltage UN	400 V		
Nominal current IN	16 A		

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>