

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER

ORIGINAL

(1)





NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING


OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
COMBINATION	DRAWN: C.B	DATE: JAN. 01/201	19		
		CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 628W2WK2622-1N2		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 628W2W	K2622-1N2	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

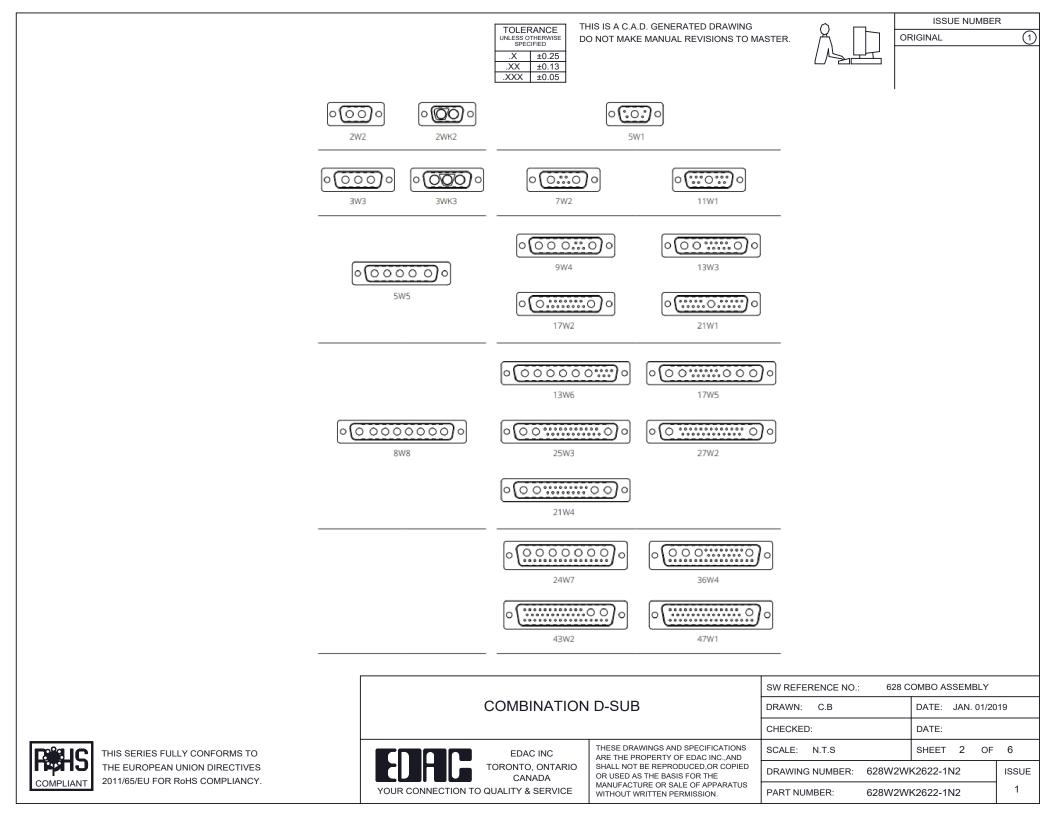

ISSUE NUMBER THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25 .XX ±0.13 .XXX ±0.05





5W5 Male

5W5 Female

47.0/

47.05

23.53

23.53

3W3 / 3WK3

8W8 Male

5W1 Male/Female

7W2 Male/Female





 $\overline{(1)}$

21W4 Male/Female



27W2 Male/Female



21W1 Male/Female

16.6


THIS SERIES FULLY THE EUROPEAN UN 2011/65/EU FOR Rol

CONFORMS TO NON DIRECTIVES HS COMPLIANCY.


	SW REFERENCE NO.: 628 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/2019	
		CHECKED:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 3 OF	4
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 628W2WK2622-1N2		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628W2W	K2622-1N2	1

CURRENT RATING / ØA 10A / 2.2 20A / 3.3


> 30A / 3.7 40A / 4.2




63.50




11W1 Male/Female




17W2 Male/Female



8W8 Female





THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER. .X ±0.25







25W3 Male









36W4 Female




13W3 Male

3


3












13W6 Male



43W2 Male






.XX ±0.13 .XXX ±0.05


9W4 Female

13W3 Female





47W1 Female



17W5 Male


COMPLIANT






2.77







		SW REFERENCE NO.: 628 COMBO ASSEMBLY			
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.			DRAWING NUMBER: 628W2WK2622-1N2		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 628W2W	K2622-1N2	1



