
| ב בר | | | 0 | | | |
|---|--|----------------------|---|------------------------------------|--|----------|
| A Z' | ØS | | | | | |
| CHARACTERISTICS | Keying Shown as example | | LAYO | OUT SHOWN AS EXAMPLE | | |
| -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer Contact Plating : Cold over copper Alloy 0.8um minimum | DimNominØS25 MaZ'31.5 MVV THREADM15x1- | x ax | due to a use o the Specifications i | | omply with by a third party notice.) diction & Control List | |
| Contact Plating : Gold over copper Alloy 0.8µm minimum Durability : 500 Mating cycles Delivered with Souriau contacts and Accessories Temperature Range : -65°C to +200°C | | | FR Not Listed PN: 8D511M99HA | | | |
| -Salt Spray : 2000 hours | | A ISS Designer | 17-10-2016 First Release DATE Latest modification d By: Date: | n - by | CUSTOMER DRAWING | MOD N° |
| | | 1 | TITLE | Composite Plug 8 | 3D series | |
| → BASIC SERIES: 8D 5 - 11 M SHELL TYPE : Plug with RFI Shielding | | SCAL NA | | General linear Tolerances: ± | NPRDS / PROJECT 859 This document is the prop | perty of |
| CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 | CONTACT TYPE : P | IN (1500 Matings) | | SOURIAU.COM | SOURIAU it must not be reproduce communicated without per | |
| PLATING : M = Nickel | CONTAC | T LAYOUT : 11-99 | AT | SOURIAU DRG N° | | SHEET |

| _ | т | ۵ | г | m | | 0 | |
|----------|----------|--|---|---|--------------------------|--|--------------------------|
| | | Contact Layout | | | | | |
| 4 | -8 | $ \begin{array}{c} $ | | | | | |
| | | X-axis Y-axis (mm) (mm) A +.065 (1.65) +.113 (2.87) B +.130 (3.30) +.000 (0.00) C +.065 (1.65) 113 (2.87) D 065 (1.65) 113 (2.87) E 130 (3.30) +.000 (0.00) F 065 (1.65) +.113 (2.87) |] | | | | |
| ω | | itacts contacts rating location 7 20 I All MS20050-99 | | | | | |
| | \vdash | | | | | SOURIAU shall not be liab due to a use of the Pro the Specifications issued by | oducts wh |
| N | | | | | | (professional recor | Countr FR |
| | | | | | A 17-10-20 | PN: 8D | 9511N |
| | | | | | ISS DATE Designed By: | Latest modification - by Date: | |
| | | | | | TITLE | | Compo |
| → | | | | | SCALE NA | -{ | al linear ances: ± |
| | | | | | SOURIA | U WWW.SOUR | RIAU.C |
| | | | | | FORMAT A3 | | RIAU 511M |
| L | Н | G | F | E | D | C | |

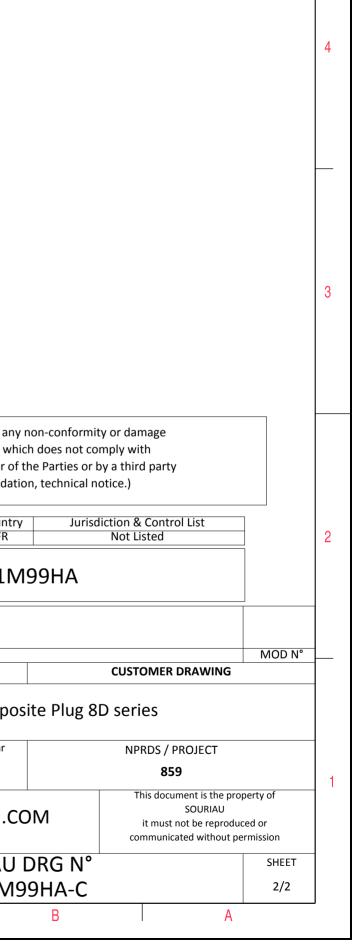

 \triangleright

σ