

1	2	3	4	5	6	7
SIGN		DATE		DESCRIPTION		APPR
△						

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:




- Item ③ Terminal(housing): Thermoplastic (UL94V-0)
- Item ④ Contact pin: Brass
- Electrical:
 - UL / VDE / TUV
 - 300V / 300V /300V
 - 15A / 12A/ 15A
- Voltage rating: 1.6KV / 2.5KV /2.5KV
- Current rating: -40°C to +115°C (-40°C to +130°C)
- Withstanding Voltage: PA66,260°C±5°C/5 Sec (PA46,280°C/10Sec)
- Operating temperature: -40°C to +115°C (-40°C to +130°C)
- Soldering temperature: PA66,260°C±5°C/5 Sec (PA46,280°C/10Sec)
- Safety Approval:
- Critical dimension:

OP XX 00 X X XXXX G

POLES
02 pole
" "
24 pole

G RoHS compliant (lead<4%)
In copper Alloy
0000: Standard
Any special item by customer request.
please contact sales department.

- 0 Tin plated 200u"
- 1 Gold plating 10u"
- 2 Gold flash

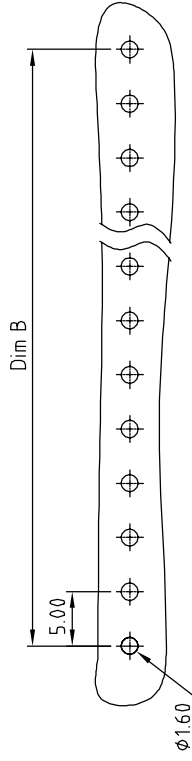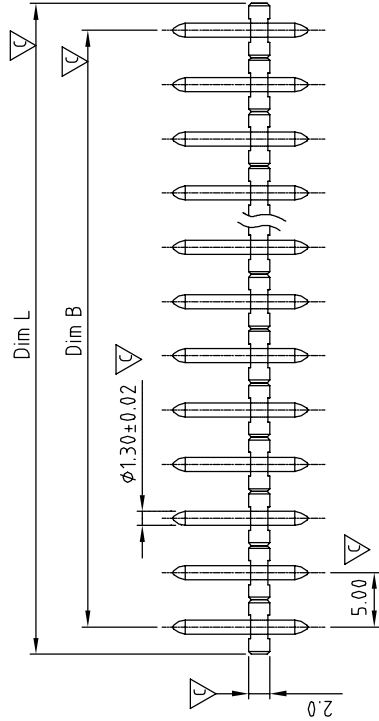

P.C.B. LAYOUT

	Dim L	Dim B
2-5p	±0.10	±0.10
6-9p	±0.15	±0.15
10-13p	±0.20	±0.20
14-17p	±0.25	±0.25
18-21p	±0.30	±0.30
22-24p	±0.40	±0.40

N = Number of poles
Dim L=Nx5.0
Dim B=(N-1)x5.0

ANYTEK

CUSTOMER COPY
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	OP 5.0 Series 12.5mm		DWG NO.	80P0085	Tolerance	X
PART NO.	OPxx00xxxxxxG		CUST NO.		X	X
APPROVED	CHECKED	DESIGNED	DRAWN		X	X
		Chen Bo 09/24, 12	Chen Bo 09/24, 12		UNIT: mm	SCALE: NONE
					SHEET: 01/01	REV.: B