


REV. 3
DCO 102710

COIL: @ 25°C	
RESISTANCE	75 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	.9 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 15 MS MAX.
	OPERATE BOUNCE 5 MS MAX.
	RELEASE BOUNCE 5 MS MAX.

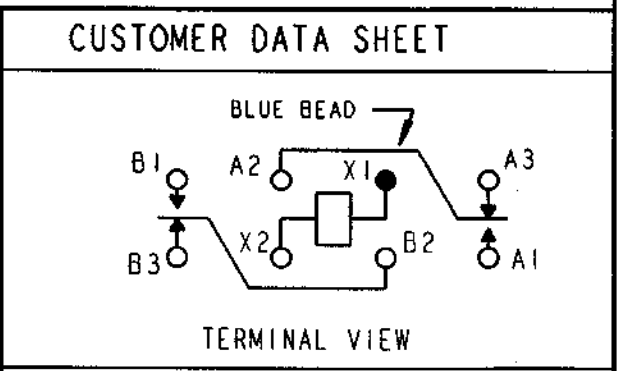

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. R.B. 7/29/91 CK. TLG 8-17-01



CUST. OPL	"07" RELAY
CUST. NO. M5757/23-008 REV.	

B07D634BB2-0118