


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** 

ORIGINAL

(1)

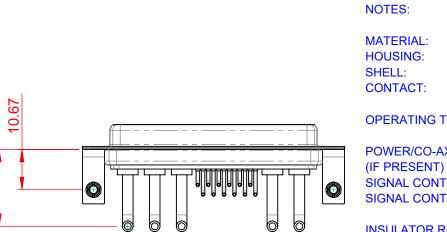

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED

**OPERATING TEMPERATURE:** -55°C ~ 125°C


POWER/CO-AX CONTACT RATING: 20A (CURRENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms

5000MΩ min.



			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-17W5650-2TB		ISSUE
			PART NUMBER: 630-17W	5650-2TB	1



20.33

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

10°

