
	I	Q	н <b>т</b>	m	0





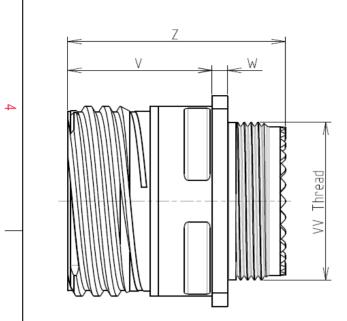

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 09

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite					
-Shell Plating	: Without Plating					
-Insulator	: Thermoplastic					
-Contacts	: Copper Alloy					
-Seals & Grommet	: Silicon Elastomer					
-Contact Plating	: Gold over copper Alloy 0.8µm minimum					
-Durability	: 500 Mating cycles					
-Delivered with Souriau contacts and Accessories						
-Temperature Range	: -65°C to +175°C					

: 2000 hours

: 9.1 g ± 10%


8D 0

G

09

Х

CONNECTO	r dimension		
Dim	Nominal		
Р	3.25±0.2		
PP	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M12x1-6g		

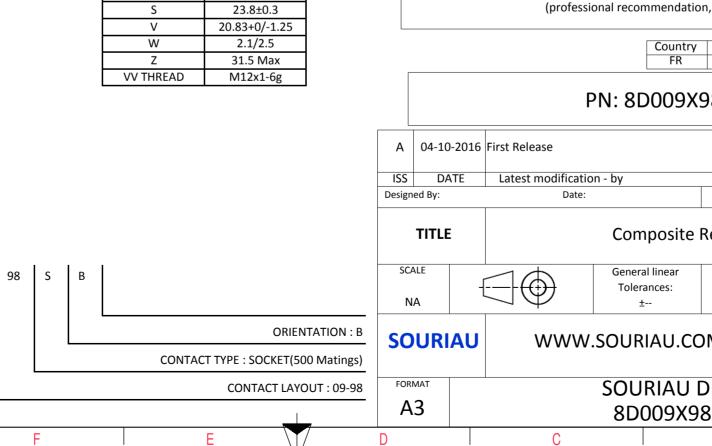

						1	
0		σ		А			
						4	
LAY	YOUT SHOWN AS EXA	MMPLE				3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country   Jurisdiction & Control List     FR   Not Listed							
PN: 8D009X98SB							
First Release Latest modificatio Date:	n - by		CUSTON	AER DRAWING	MOD N°		
Composite Receptacle 8D series							
$\exists \bigoplus$	General linear Tolerances: ±			95 / PROJECT 859		1	
WWW.SOURIAU.COM This document is the property of SOURIAU   it must not be reproduced or communicated without permission							
SOURIAU DRG N°   SHEET     8D009X98SB-C   1/2							
С		В		А		I	

		۵	<del>ات</del>	m		0	
		Contact Layout					Panel Cutor
4	-X				Ā	SQUARE FLANGE RECEPTACLE (TYPE C REAR MOUNTING	
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	X_axis   Y_axis (mm)   (mm)     + 065 (1.65)   + 0.38 (0.97)     + 000 (0.00)   - 0.75 (1.91)     - 0.65 (1.65)   + 0.38 (0.97)			¥ 22 -		ØT
ى ن						Di Ø Ø R Ø	A A 1
-	F						
						SOURIAU shall not be due to a use of the the Specifications issue (professional r	e Products wh ed by either of
N						PN:	Countr FR 8D0092
					A 04-10-20 ISS DATE	16 First Release	
					Designed By:	Date:	
					TITLE	C	Composite
<b>_</b>					SCALE NA		eneral linear Tolerances: ±
					SOURIA	J WWW.SO	URIAU.C
					FORMAT A3		DURIAU 3D009X
l	Н	G	F	E	D	C	

