


SPECIFICATION

1. MECHANICAL

E>D>C>A>

Manual measurement probe for JSC-Male and LSC-Male.

Calibration adapter for JSC-Female automatic and manual probe, LSC-Female manual probe and JSC/LSC cable plug automatic and manual probe.

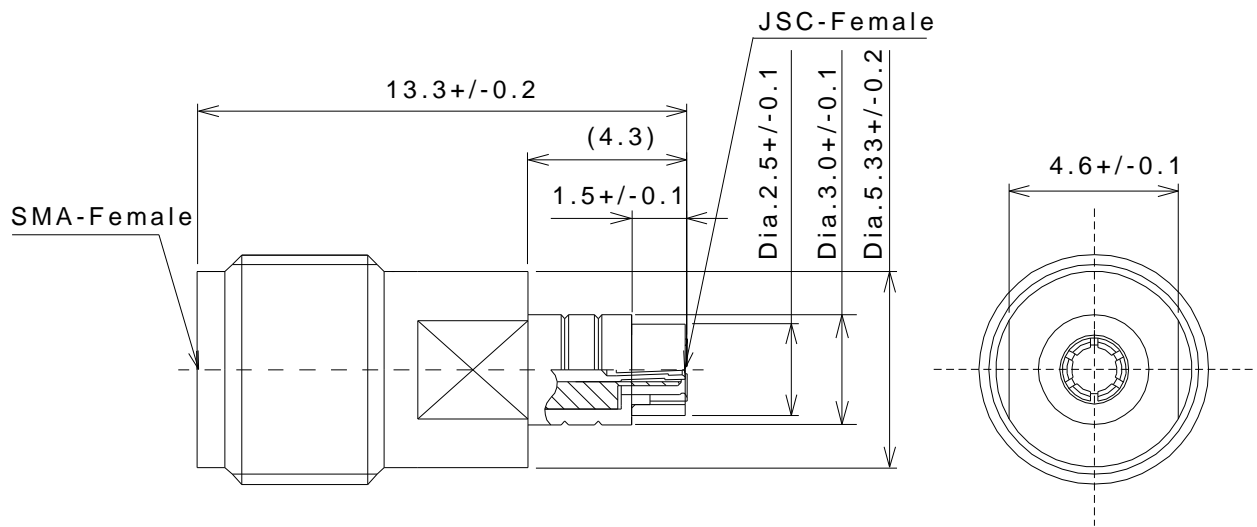

SCALE:FREE
 UNIT: mm

2. RATING:

>B >C >D

Item		Specification
Voltage Rating		30V r.m.s. maximum
Nominal Frequency Range	JSC	DC to 12GHz
	LSC	DC to 6GHz
Nominal Impedance		50Ω
Temperature Rating		-40°C to +85°C
Insulation Resistance		500 MΩ minimum
Withstanding Voltage		AC 200V
E> Voltage Standing Wave Ratio (V.S.W.R.)	JSC	1.3 max. (DC to 3GHz) 1.4 max. (3GHz to 6GHz) 1.5 max. (6GHz to 9GHz) 1.7 max. (9GHz to 12GHz)
	LSC	1.4 max. (DC to 3GHz) 1.6 max. (3GHz to 6GHz)
Durability		1K cycles