

PCS.01.250.DLLE31

SUMMARY

Wires

Coax



Image is for illustrative purpose only

| Series | 01 | |
|------------------|-------------------|--|
| Termination type | Female solder | |
| IP rating | 50 | |
| AWG wire size | 0.00 - 0.00 | |
| Cable Ø | 0.00 - 0.00 mm | |
| Status | active | |
| Matching parts | FFS.01.250.DLAE31 | |

1

Download

Request a quote Catalog

TECHNICAL DETAILS

Mechanics

| Shell Style/Model | PCS*: Free receptacle with cable crimping |
|-------------------|--|
| Keying | Circular, female |
| Housing Material | Brass (gold plated [ISO 27874]) shell, collet nut, brass latch sleeve and mid pieces |
| Weight | 1.40 g |
| Performance | |
| Configuration | 01.250 : 1 Coax (50 Ohm) |
| Insulator | |


Rated Current

Others

Endurance (Shell): 1000 mating cycles

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

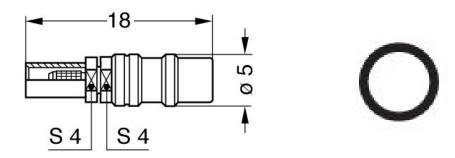

Dimensions

| | А | L | S1 | S2 |
|-----|------|------|------|------|
| mm. | 5 | 18 | 4 | 4 |
| in. | 0,20 | 0,71 | 0,16 | 0,16 |

RECOMMENDED BY LEMO

Tools

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.