



ISSUE NUMBER	
ORIGINAL	(1)

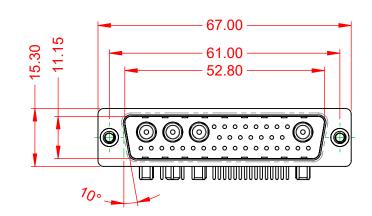




-55°C ~ 125°C

## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

**OPERATING TEMPERATURE:** 

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




POWER/CO-AX CONTACT RATING:40A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE: $10m\Omega$  MAX.INSULATOR RESISTANCE:5000MΩ min.DIELECTRICDIELECTRIC

 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	19
			CHECKED:	DATE:	
S TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TIVES ANCY.	CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-36W	4650-4T2	ISSUE
			PART NUMBER: 629-36W	4650-4T2	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

