
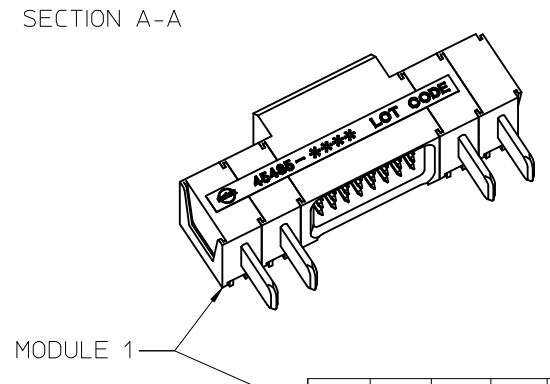

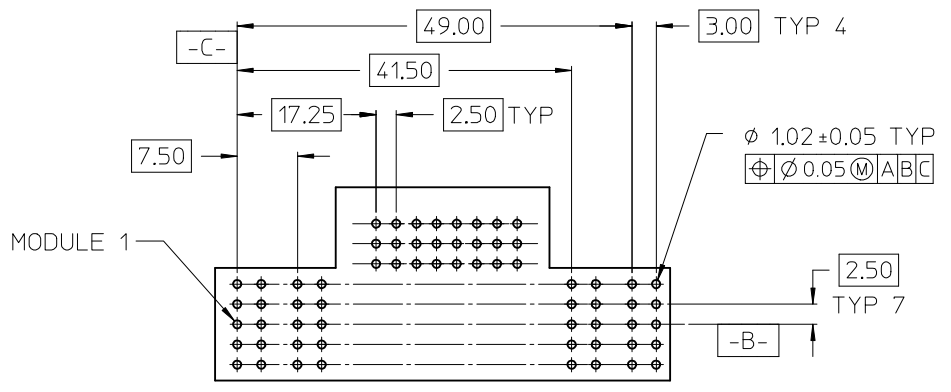
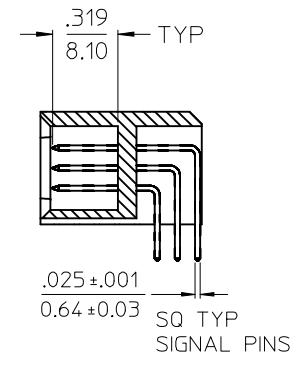
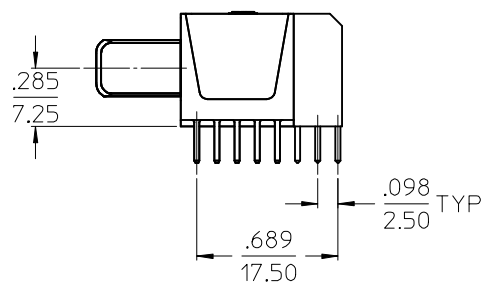
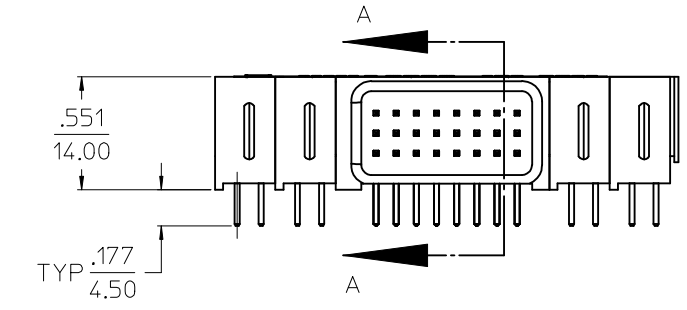


- NOTES:
1. MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.
CONTACTS: COPPER ALLOY
 2. FINISH: SELECT GOLD: 30 MI MIN.
SELECT TIN: 100 MI MIN.
BOTH OVER NICKEL
 3. PRODUCT SPECIFICATION: PS-45424-001.
 4. PACKAGING SPECIFICATION: PK-45485-001.

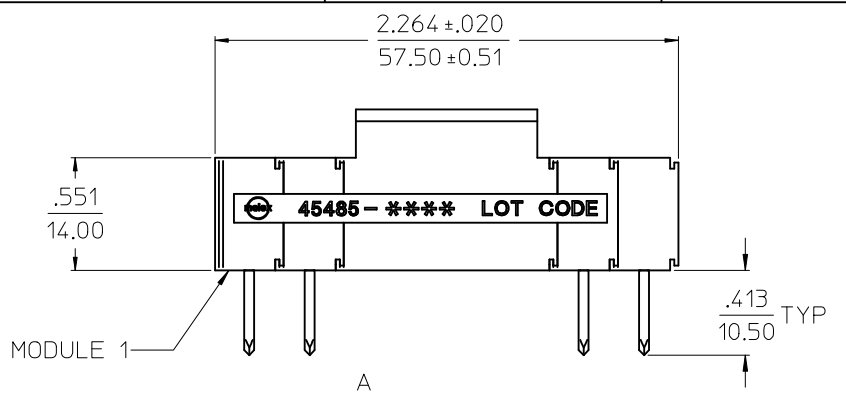

PD	PD	PD	PD	PD
105	105	334	105	105

PCB LAYOUT: COMPONENT SIDE
PCB THICKNESS: .125/3.18
PCB TOLERANCE: $\pm .002/0.05$

GEOM TOL PCB	DESCRIPTION
EC NO: UCP2005-2625	
DRWN: ADRA1N02005/07/07	
CHKD: KSAMIEC 2005/07/08	
APPR: APATEL 2005/07/13	
REV	
E1	

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm
	INCH
4 PLACES	\pm ---
3 PLACES	\pm ---
2 PLACES	± 0.25
1 PLACE	± 0.38
ANGULAR $\pm 1/2^\circ$	
DRAFT WHERE APPLICABLE	
MUST REMAIN WITHIN DIMENSIONS	

SCALE	DESIGN UNITS
1:1	METRIC
DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
SAMIEC	2003/03/26
CHECKED BY	DATE
MARGULIS	2003/03/26
APPROVED BY	DATE
MARGULIS	2003/03/26

THIRD ANGLE PROJECTION		REVISE ON CAD ONLY	
TITLE			
POWER DOCK ASSEMBLY			
POWER			
RIGHT ANGLE SOLDER TAIL			
molex MOLEX INCORPORATED			
MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
45485-0006	SD-45485-006	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			