


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

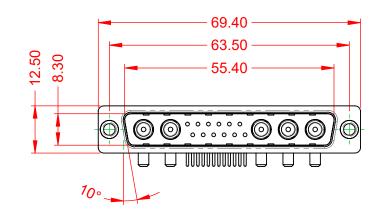




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




20A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. 5000MΩ min. **INSULATOR RESISTANCE:** DIELECTRIC

WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

-55°C ~ 125°C

1000V AC rms



	COMBINATION D-SUB			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
				DRAWN: C.B		DATE: JAN. 01/2019	
				CHECKED:		DATE:	
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 OF	2
		TORONTO, ONTARIO CANADA D QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING	NUMBER: 629-17V	V5640-2T1	ISSUE
YOU	YOUR CONNECTION TO			PART NUM	IBER: 629-17V	V5640-2T1	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

