


TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL


(1)



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED

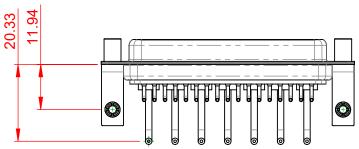

OPERATING TEMPERATURE:

POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.


INSULATOR RESISTANCE: DIELECTRIC

WITHSTANDING VOLTAGE:


5000MΩ min.

-55°C ~ 125°C

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	YOUR CONNECTION TO QUALITY & SERVICE		DRAWING NUMBER: 630-24W7650-1T5		ISSUE
			PART NUMBER: 630-24W	7650-1T5	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

