1SNK900103R0000 - ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK900103R0000 Terminal Block & Strip Insulating Accessories, Circuit Separator, Used With Screw Clamp Terminal Blocks, -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK

View on TE.com >





Insulating Accessory Type: Circuit Separator

Compatible With Block or Strip Type: Screw Clamp Terminal Blocks

Operating Temperature Range: -55 – 110 °C [-67 – 230 °F]

Features

Product Type Features

Insulating Accessory Type	Circuit Separator
Body Features	
Product Weight	5.2 g[.183 oz]
Primary Product Material	Polyamide
Primary Product Color	Dark Gray
Dimensions	
Product Spacing	3 mm[.118 in]
Product Depth	60 mm[2.362 in]
Product Height	71 mm[2.795 in]
Usage Conditions	
Installation Temperature Range	-5-40 °C[23-104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Operation/Application	
Compatible With Block or Strip Type	Screw Clamp Terminal Blocks
Industry Standards	



C For support call+1 800 522 6752

Terminal Block & Strip Insulating Accessories, Circuit Separator, Used With Screw Clamp Terminal Blocks, -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



UL Flammability	Rating
-----------------	--------

UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Terminal Block & Strip Insulating Accessories, Circuit Separator, Used With Screw Clamp Terminal Blocks, -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



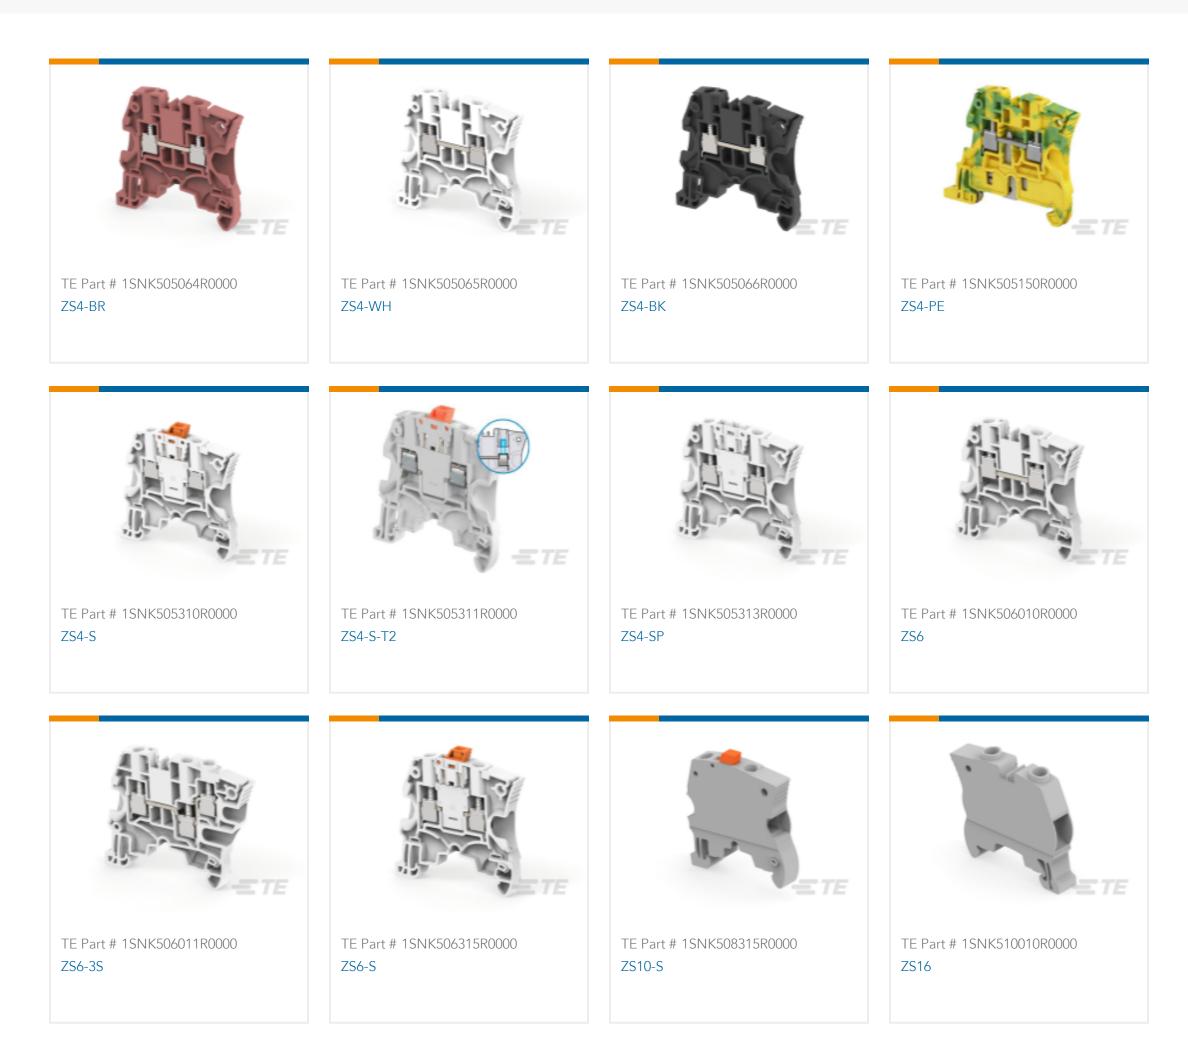



Also in the Series | ENTRELEC SNK

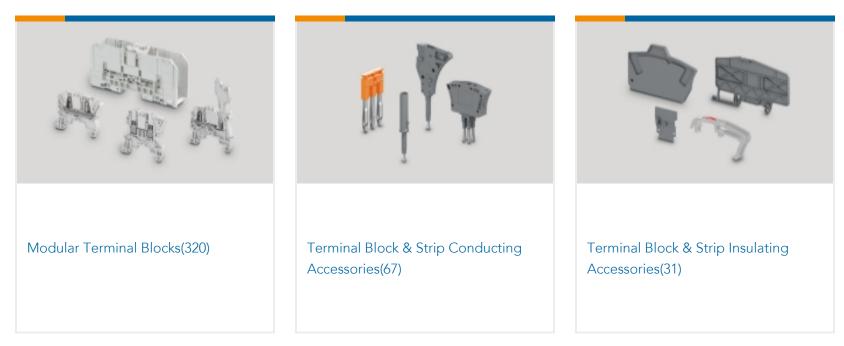

Customers Also Bought

C For support call+1 800 522 6752

Terminal Block & Strip Insulating Accessories, Circuit Separator, Used With Screw Clamp Terminal Blocks, -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK





Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1SNK900103R0000_A.2d_dxf.zip English Customer View Model ENG_CVM_CVM_1SNK900103R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK900103R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

Terminal Block & Strip Insulating Accessories, Circuit Separator, Used With Screw Clamp Terminal Blocks, -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



CS-R1

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)