


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

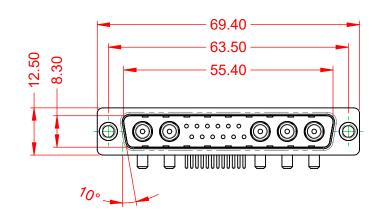




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC


WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

20A (CURRENT)

-55°C ~ 125°C

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19		
			CHECKED: DATE:		ATE:	
YOUR CONNECTI	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-17W5240-2N1		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-17W	5240-2N1	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

