


**NOTES:**

1. RESISTANCE @ 25°C : 10KΩ ± 1%
2. BETA VALUE (0/50°C) : 3600K ± 1%
3. OPERATING TEMPERATURE RANGE : -40°C TO +250°C.
4. THERMAL TIME CONSTANT : 15SEC IN WATER
5. VOLTAGE BREAKDOWN STRENGTH : 1500V AC FOR 3SEC.
6. INSULATION RESISTANCE : A MINIMUM OF 100MΩ @ 500VOLTS DC.
7. DISSIPATION FACTOR : 1mW/°C.
8. LASER MARKING "MOLEX-DATE CODE(MM/YY)" & "XXK(R25-value) XXXX(B-value)"

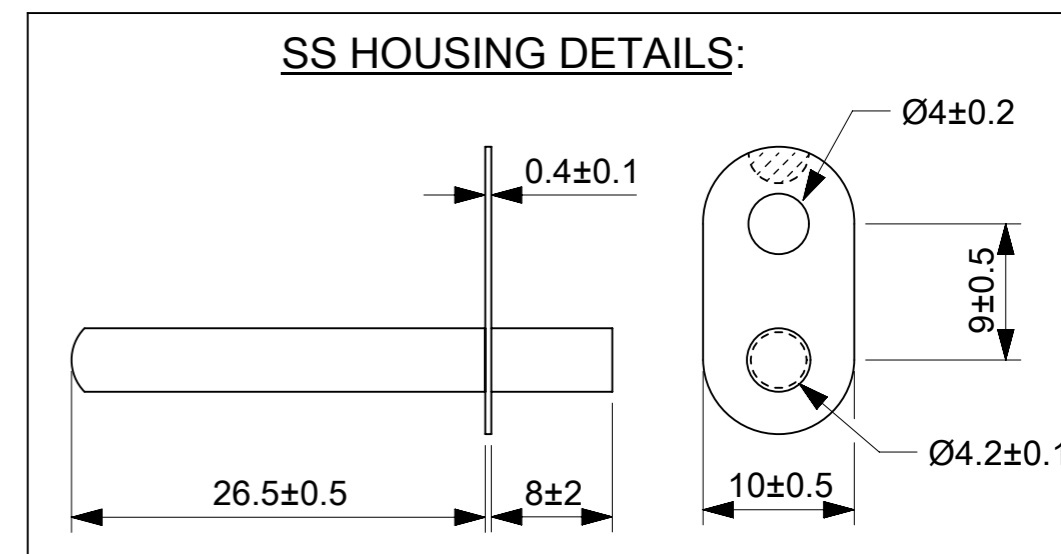


FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<b>molex</b>
	△/A = 0	mm	NTS		
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 733229		GLASS NTC MOUNTING -10K±1%,B3600,L300
	△/E = 0	ANGULAR TOL ± °		DRWN: NANDAK 2022/12/23	
DIVISIONAL SYMBOLS	△/F = 0	4 PLACES ±	CHK'D: RBBHASKAR 2022/12/23	APPR: RBBHASKAR 2022/12/23	PRODUCT CUSTOMER DRAWING
	△/G = 0	3 PLACES ±	INITIAL REVISION:		
	△/H = 0	2 PLACES ±	DRWN: RAVIKM 2022/01/28	APPR: RBBHASKAR 2022/02/10	DOCUMENT NUMBER
	△/I = 0	1 PLACE ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		2185343619
		0 PLACES ±	THIRD ANGLE PROJECTION	DRAWING	SERIES
				A3-SIZE	218534
				MATERIAL NUMBER	CUSTOMER
				2185343619	GENERAL MARKET
				DOC TYPE	DOC PART
				PSD	000
				REVISION	B4
				SHEET NUMBER	1 OF 2

**RESISTANCE VS TEMPERATURE CHARACTERISTICS**

TEMP (□)	Rmin(KΩ)	Rnom(KΩ)	Rmax(KΩ)
-40	224.87	234.42	244.35
-35	169.65	176.35	183.30
-30	129.00	133.73	138.61
-25	98.843	102.19	105.64
-20	76.292	78.668	81.111
-15	59.302	60.994	62.728
-10	46.409	47.615	48.848
-05	36.558	37.418	38.294
00	28.980	29.592	30.214
05	23.114	23.548	23.988
10	18.543	18.850	19.159
15	14.961	15.176	15.391
20	12.138	12.286	12.434
25	9.900	10.000	10.100
30	8.084	8.182	8.280
35	6.635	6.728	6.823
40	5.472	5.560	5.649
45	4.535	4.617	4.699
50	3.776	3.851	3.927
55	3.158	3.227	3.296
60	2.653	2.715	2.778
65	2.238	2.295	2.352
70	1.896	1.947	1.999
75	1.613	1.659	1.706
80	1.377	1.419	1.461
85	1.181	1.218	1.256
90	1.016	1.050	1.084
95	0.8773	0.9076	0.9390
100	0.7602	0.7876	0.8160
105	0.6610	0.6858	0.7115
110	0.5766	0.5991	0.6223
115	0.5047	0.5250	0.5461
120	0.4431	0.4615	0.4807
125	0.3902	0.4069	0.4244
130	0.3446	0.3599	0.3758
135	0.3053	0.3191	0.3336
140	0.2711	0.2838	0.2970
145	0.2415	0.2531	0.2652
150	0.2156	0.2262	0.2373

TEMP (□)	Rmin(KΩ)	Rnom(KΩ)	Rmax(KΩ)
155	0.1931	0.2028	0.2129
160	0.1733	0.1822	0.1915
165	0.1559	0.1640	0.1726
170	0.1405	0.1481	0.1560
175	0.1270	0.1339	0.1412
180	0.1150	0.1214	0.1281
185	0.1044	0.1103	0.1165
190	0.0949	0.1004	0.1062
195	0.0865	0.0915	0.0969
200	0.0789	0.0836	0.0886

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
$\nabla_A = 0$	mm	NTS	 GLASS NTC MOUNTING -10K±1%,B3600,L300 PRODUCT CUSTOMER DRAWING
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		
$\nabla_F = 0$	ANGULAR TOL ± °		
DIVISIONAL SYMBOLS	4 PLACES	±	
	3 PLACES	±	EC NO: 733229
	2 PLACES	±	DRWN: NANDAK 2022/12/23
	1 PLACE	±	CHK'D: RBBHASKAR 2022/12/23
	0 PLACES	±	APPR: RBBHASKAR 2022/12/23
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		INITIAL REVISION:
	THIRD ANGLE PROJECTION		DRWN: RAVIKM 2022/01/28
	DRAWING		APPR: RBBHASKAR 2022/02/10
	A3-SIZE	SERIES	DOCUMENT NUMBER
	218534	MATERIAL NUMBER	2185343619
		CUSTOMER	GENERAL MARKET
			DOC TYPE DOC PART REVISION
			PSD 000 B4
			SHEET NUMBER
			2 OF 2