

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0430452206](#)
Status: **Active**
Overview: [Micro-Fit Connector System](#)
Description: Micro-Fit 3.0 Right-Angle Header, 3.00mm Pitch, Dual Row, 22 Circuits, with PCB Press-fit Metal Retention Clip, Tin, Glow-Wire Capable, Black, Tape and Reel

Documents:

3D Model (PDF)	Packaging Specification 430450001-PK-000 (PDF)
3D Model	Test Summary 430450004-TS-000 (PDF)
Drawing (PDF)	Test Summary TS-43045-001-001 (PDF)
Product Specification 430450001-PS-KO-000 (PDF)	Test Summary TS-46235-001-001 (PDF)
Product Specification 430450001-PS-SP-000 (PDF)	Datasheet (PDF)
Product Specification PS-43045-001 (PDF)	Symbol Footprint Data SYM-43045-2206-001 (PDF)
Application Specification AS-43045-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179


General

Product Family	PCB Headers
Series	43045
Application	Power, Wire-to-Board
Comments	""""""""High Temperature Square Pin Solder Type<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""""

Overview	Micro-Fit Connector System
Product Name	Micro-Fit 3.0
UPC	800754375900

Physical

Breakaway	No
Circuits (Loaded)	22
Circuits (maximum)	22
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	Yes
Mated Height	10.29mm
Material - Metal	Brass

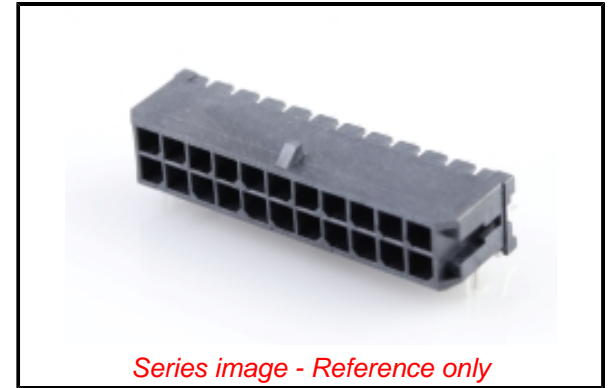

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contained Per -
D(2021)4569-DC (8
July 2021)
Dibutylbis(pentane-2,4-
dionato-O,O')tin
2-ethylhexyl 10-
ethyl-4,4-dioctyl-7-
oxo-8-oxa-3,
Phenol, 2-(2H-
benzotriazol-2-yl)-4,6-
bis(1,1-dim
Ammonium-
pentadecafluorooctanoate
C.I. Direct Black 38
Dibutyltin-dichloride
1,2-diethoxyethane
1,2-
Benzenedicarboxylic
acid, bis(3-
methylbutyl)
Disodium 3,3'-[[1,1'-
Biphenyl]-4,4'-
Diylbis(Azo)
Octamethylcyclotetrasiloxane
Decamethylcyclopentasiloxane
Dodecamethylcyclohexasiloxane
Octanoic acid,
2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-
pen
Benzo(ghi)perylene
Dipentyl phthalate
2-(2H-Benzotriazol-2-
yl)-4,6-
ditertpentylphenol
Perfluorohexane-1-
sulphonic acid and its
salts

China RoHS

Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.177/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.254µm
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	8.5A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	030
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-43045-001-001
Packaging Specification	430450001-PK-000
Product Specification	430450001-PS-KO-000, 430450001-PS-SP-000, PS-43045-001
Sales Drawing	SD-43045-003-000
Symbol/Footprint Data	SYM-43045-2206-001
Test Summary	430450004-TS-000, TS-43045-001-001, TS-46235-001-001

Perfluorononan-1-oic acid
(2,2,3,3,4,4,5,5,6,6,7
Dioctyltin dilaurate,
stannane, dioctyl-,
bis(co
Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]o
Pyrene
Fluoranthene
Perfluorobutane
sulfonic acid (PFBS)
and its sal
Tris(4-nonylphenyl,
branched and linear)
phosphi
Nonadecafluorodecanoic
acid (PFDA) and its
sodiu
Zirconia
Aluminosilicate
Refractory Ceramic
Fibr
1,2-
Benzenedicarboxylic
acid, dipentyl ester, br
diisohexyl phthalate
1,2-
Benzenedicarboxylic
acid, dihexyl ester,
bra
2-(2H-Benzotriazol-2-
yl)-4-(tert-butyl)-6-
(sec-b
2-(2H-Benzotriazol-2-
yl)-4,6-
ditertpentylphenol
Cadmium
Lead
Lead(II,IV)-oxide
Cadmium-oxide
Diboron-trioxide
Decabromodiphenylether
1,2-bis(2-
methoxyethoxy)ethane
1,2-Dimethoxyethane
bis(2-methoxyethyl)
ether
Tris(2-chloroethyl)
phosphate
Lead chromate
molybdate sulfate red
Lead chromate
Bis(tributyltin) oxide
Alkanes, C10-13,
chloro
Cobalt-dichloride
Cadmium
Dipentyl phthalate
Imidazolidine-2-thione
Phenanthrene
N,N-
Dimethylformamide
4-aminoazobenzene
[Phthalato(2-)]dioxotrilead

Silicic acid (H₂Si₂O₅),
barium salt (1:1),
lead-
Sulfurous Acid, Lead
Salt, Dibasic
Cyanamide, lead(2+)
salt (1:1)
Lead titanium
zirconium oxide
Dioxobis(stearato)trilead
Tetralead-trioxide-
sulphate
Pentalead-tetraoxide-
sulphate
Lead-titanium-trioxide
Lead-dinitrate

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[43045](#) Series

Mates With

Micro-Fit 3.0 Receptacle Housing [43025](#)

Micro-Fit 3.0 TPA Receptacle Housing
[172952](#)

This document was generated on 08/31/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION