



(1)

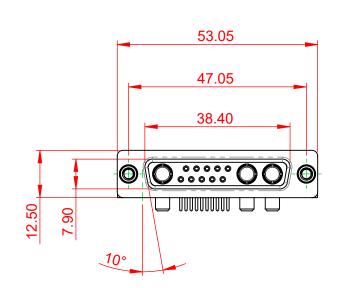



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED

0 \odot

OPERATING TEMPERATURE:

.XX ±0.13


.XXX ±0.05

POWER/CO-AX CONTACT RATING: 40A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.


INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:



-55°C ~ 125°C



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:		DATE:	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
			DRAWING NUMBER: 630-13W3640-4NE		ISSUE	
			PART NUMBER: 630-13W	3640-4NE	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



