


Units:mm

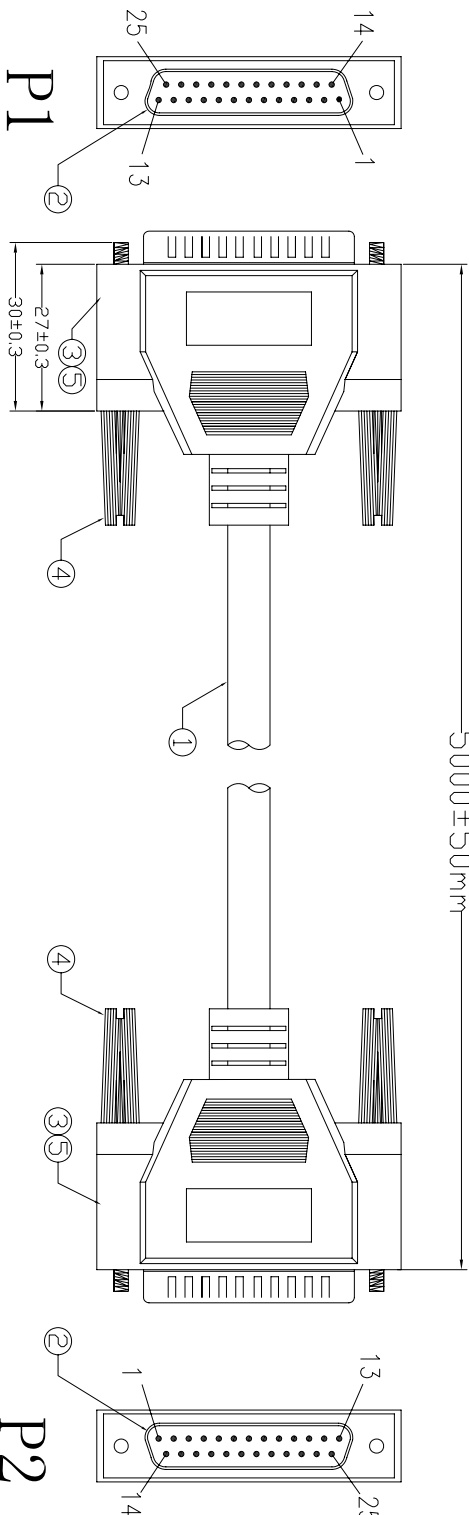

**Electrical test:**  
 1. 100% short open, miswire test  
 2. Conduct resistance: 5 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V


PIN ASSIGNMENT	
P1 1	棕
P1 18	棕/黑
P1 2	红
P1 19	红/黑
P1 3	橙
P1 19	橙/黑
P1 4	黄
P1 20	黄/黑
P1 5	绿
P1 20	绿/黑
P1 6	蓝
P1 21	蓝/黑
P1 7	紫
P1 21	紫/黑
P1 8	白
P1 22	白/黑
P1 9	粉红
P1 22	粉红/黑
P1 10	棕/白
P1 24	棕/白
P1 11	橙/白
P1 23	橙/白
P1 12	绿/白
P1 24	绿/白
P1 13	紫/白
P1 24	紫/白
P1 14	浅灰/白
P1 15	红/棕
P1 16	黄/棕
P1 25	橙/棕
P1 15	绿/棕
P1 23	蓝/棕
P1 17	紫/棕
P1 25	棕/红
P1 25	浅灰/红
P1 25	DRAIN+BRAID
P2 1	棕
P2 18	棕/黑
P2 2	红
P2 19	红/黑
P2 3	橙
P2 19	橙/黑
P2 4	黄
P2 20	黄/黑
P2 5	绿
P2 20	绿/黑
P2 6	蓝
P2 21	蓝/黑
P2 7	紫
P2 21	紫/黑
P2 8	白
P2 22	白/黑
P2 9	粉红
P2 22	粉红/黑
P2 10	棕/白
P2 24	棕/白
P2 11	橙/白
P2 23	橙/白
P2 12	绿/白
P2 24	绿/白
P2 13	紫/白
P2 24	紫/白
P2 14	浅灰/白
P2 15	红/棕
P2 16	黄/棕
P2 25	橙/棕
P2 15	绿/棕
P2 23	蓝/棕
P2 17	紫/棕
P2 25	棕/红
P2 25	浅灰/红
P2 25	DRAIN+BRAID

# CNC Tech, LLC

Industrial Cable and Connector Technology

NO.	NAME	Q'TY	SPECIFICATION
⑧	TIE	3	WHITE L=200mm
⑦	PE BAG	1/5	CLEAR SIZE: 360*380*0.05mm PRINT BLACK MADE IN CHINA * "SPCS" 及印生产日期, 有透气孔.
⑥	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK MADE IN CHINA * "+" IPC" 及印生产日期, 有透气孔.
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM
④	SCREW	4	#4-40UNC TYPE L=30mm, NICKEL PLATED, MOLD: BEIGE(V-29) ABS
③	IN JACKET	18g	CLEAR LD-PE (Mould NO.: NM-33)
②	CONN	60g	BEIGE(V-29) 40P PVC(Mould NO.: WM-071)
①	CABLE	1	UL20276 28AWG(7/0.12TC)+18P+D(26AWGTC)+AL/WY+BRAID(85%) 0D7.5±0.15mm JACKET BEIGE(V-29) L=5000±20mm.

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	700-10119-00500
DECIDE BY		DATE	2012-02-22
VERSIONS/EDITION	A/0	PROJECTION	

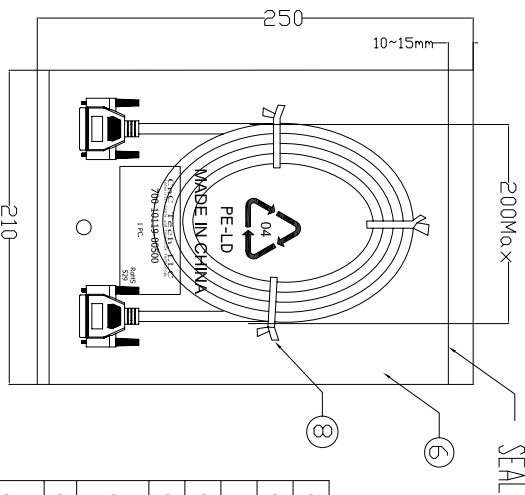

4 3 2 1