
	Т		Q	П		т		D		C		_
4		Z'	V Thread	ØS								
ω				Keying Shov	vn as example					LAYOU	T SHOWN AS EX	A
	CHARACTERISTICS				Connecto	r dimension						
	-Standard : Based on M		III		Dim ØS	Nominal 35.7 Max	4					
N	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating	: 500 Mating cycles		n	Z' VV THREAD	31.5 Max M25x1-6g				SOURIAU shall not b due to a use of th the Specifications issu (professional	ne Products whi led by either of	icł tł ior y
		 -65°C to +200°C 	501163									_
	-Salt Spray	: 2000 hours								First Release		
—	-Mass	: 31.3 g ± 10%						ISS Designed By:	DATE :	Latest modification - b Date:	ру	T
								тіт	LE		Compo	si
	BASIC SERIES:	8D	5 - 17	M 75 A N				SCALE	-[-		General linear Tolerances:	
→	SHELL TYPE : Plug with RFI Shielding							NA				
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : N SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings)							SOUF	SOURIAU WWW.SOURIAU			0
	PLATING : M = N	lickel				CONTACT LAY		FORMAT		C	OURIAU	Г
				I				A3			3D517M7	
L	Н		G	F		E	1	D		С		_
						V	/					



-	Ŧ	۵	н т	m	D	0
4		Contact Layout 75				
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				
ယ						
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either or (professional recommendat
N					A 17-10-20	Countr FR PN: 8D517N
					ISS DATE Designed By: TITLE	Latest modification - by Date: Compo
_					SCALE NA SOURIAI	General linear Tolerances: ± U WWW.SOURIAU.C SOURIAU
	Н	G	F	E	A3 D	8D517M

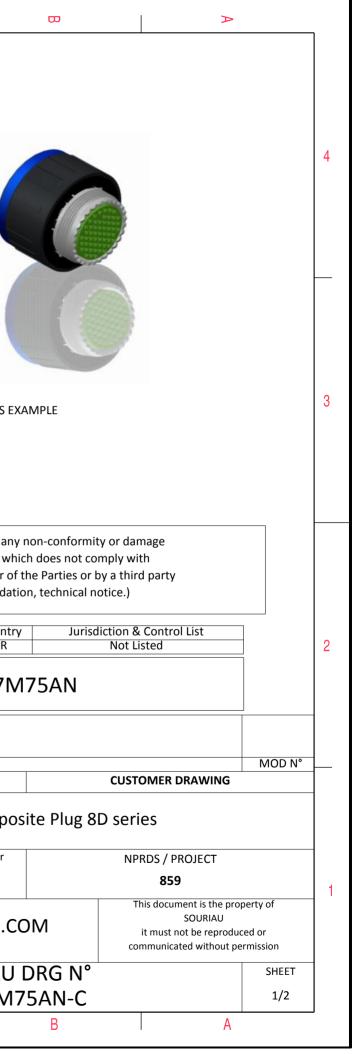