





ISSUE NUMBER	
ORIGINAL	(1)

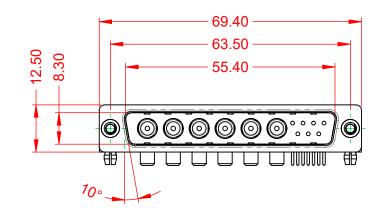




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

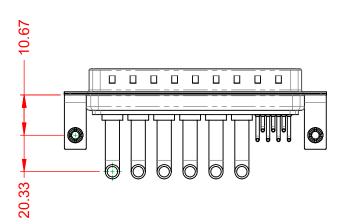

OPERATING TEMPERATURE: $-55^{\circ}C \sim 125^{\circ}C$ POWER/CO-AX CONTACT RATING:40A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE: $10m\Omega$  MAX.INSULATOR RESISTANCE: $5000M\Omega$  min.DIELECTRICDIELECTRIC

.XX ±0.13 .XXX ±0.05

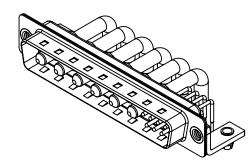

	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
IVES NCY.	EDAG INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 629-13W6250-413		ISSUE
			PART NUMBER: 629-13W	6250-4T3	1

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

