

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER




(1)



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

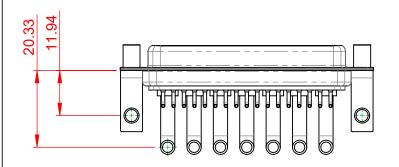

OPERATING TEMPERATURE:


POWER/CO-AX CONTACT RATING: 40A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC

WITHSTANDING VOLTAGE:

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-24W7250-4N6		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-24W	7250-4N6	1



THIS SERIES FULLY CONFO THE EUROPEAN UNION DIR 2011/65/EU FOR RoHS COM

	I
DRMS TO	
RECTIVES	
PLIANCY.	

5000MΩ min.

-55°C ~ 125°C

