

TOLERANCE UNLESS OTHERWISE SPECIFIED X ±0.25 .XX ±0.13 .XXX ±0.05


10.70

2.54

## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATED

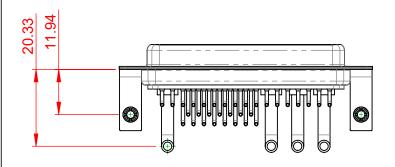

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.


COMPLIANT

OPERATING TEMPERATURE:  $-55 \,^{\circ}\text{C} \sim 125 \,^{\circ}\text{C}$ POWER/CO-AX CONTACT RATING: 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10 \,\text{m}\Omega$  MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:



1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 630-36W4650-3N3		ISSUE
			PART NUMBER: 630-36W	4650-3N3	1



(1)



