

 (L)	 	0	0



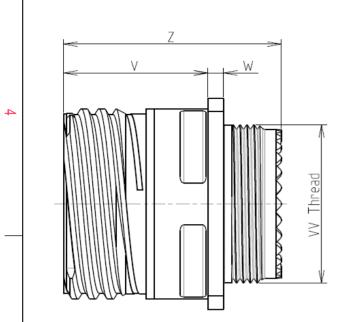

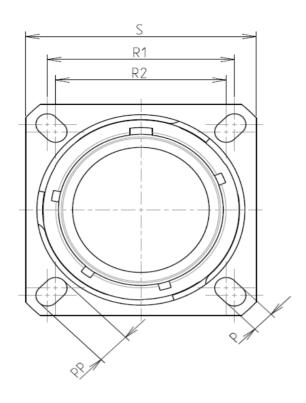

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 25

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			

: 99.25 g ± 10%

8D 0

G

25

S

61

Ρ


F

А

Connector dimension				
Dim	Nominal			
Р	3.91±0.2			
PP	6.15±0.2			
R1	38.1			
R2	34.93			
S	46±0.3			
V	20.07+0/-1.25			
W	2.1/3.2			
Z	31.5 Max			
VV THREAD	M37x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

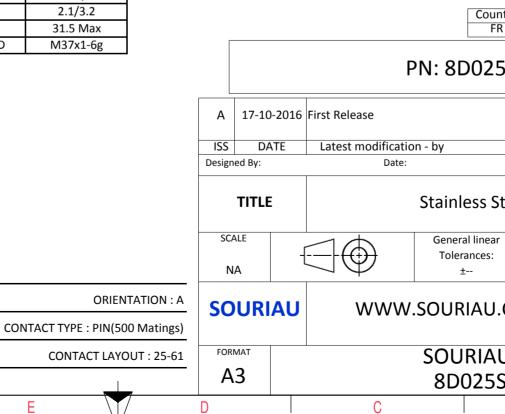

	-
	4
	-
AS EXAMPLE	3
r any non-conformity or damage s which does not comply with er of the Parties or by a third party ndation, technical notice.)	
untry Jurisdiction & Control List FR Not Listed	2
SS61PA	-
CUSTOMER DRAWING	-
Steel Receptacle 8D series	
Ar NPRDS / PROJECT 859 J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission	1
859 J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission VUDRG N° SHEET	1
859 J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission	1

