

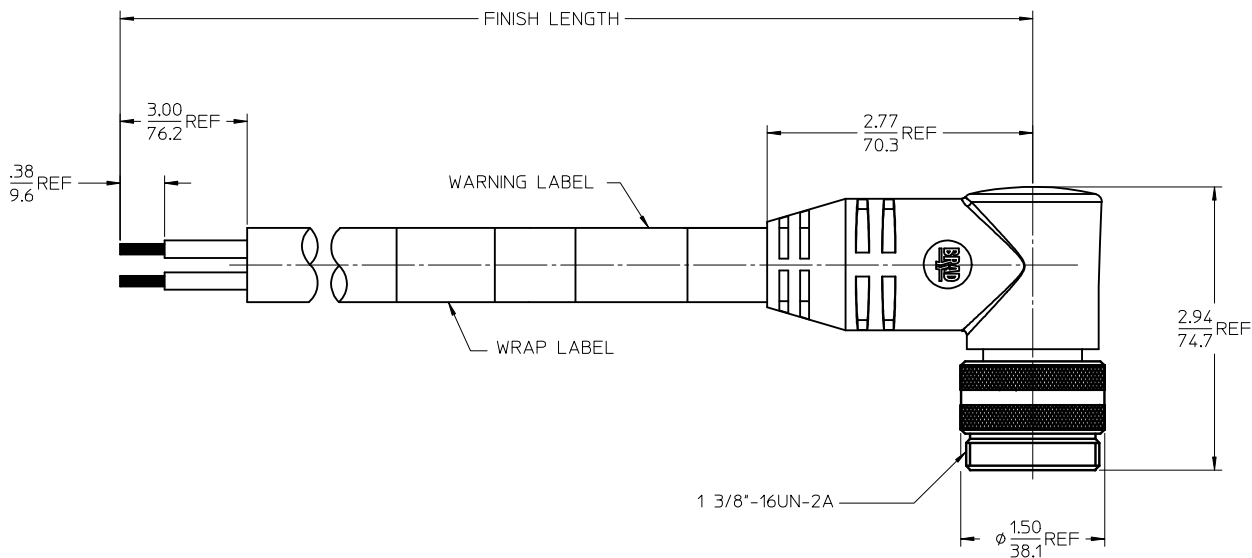


POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630194	C03007A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300630169	C04007A48M020	32	2M +89-0MM (6'7"+3.50-0)

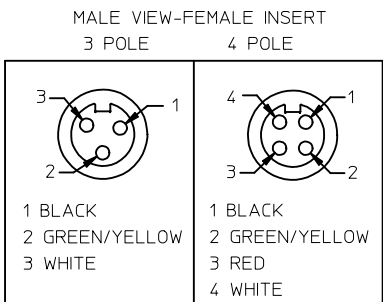

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & ST00W
ELECTRICAL: 600V AC/DC

UPDATED PROFILE EC NO: IPG2014-1160 DRWNG:GGUSTAFSON 2013/12/26 CHKD:VOU 2014/01/15 APPR:RWOODMAN 2014/05/12	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>2 PLACES</td> <td>± .010</td> <td>± .0010</td> </tr> <tr> <td>1 PLACE</td> <td>± .020</td> <td>± .0020</td> </tr> </tbody> </table> ANGULAR ±1/2°		mm	INCH	4 PLACES	± .005	± .0005	3 PLACES	± .005	± .0005	2 PLACES	± .010	± .0010	1 PLACE	± .020	± .0020	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			mm	INCH																	
	4 PLACES		± .005	± .0005																	
	3 PLACES		± .005	± .0005																	
2 PLACES	± .010	± .0010																			
1 PLACE	± .020	± .0020																			
	IN/MM	1:2	INCH																		
	DRAWN BY	DATE	TITLE																		
	B.RUPERT	01/12/2010	QUICK CHANGE MALE 90 DEGREE 3 & 4 POLE PORTABLES																		
	CHECKED BY	DATE	Molex MOLEX INCORPORATED																		
	B. WOODMAN	01/12/2010	DOCUMENT NO. SD-130063-194																		
	APPROVED BY	DATE	SHEET NO. 1 OF 1																		
	JFMURPHY	2010/01/15	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
	MATERIAL NO.	SEE CHART																			
	SIZE	C																			