
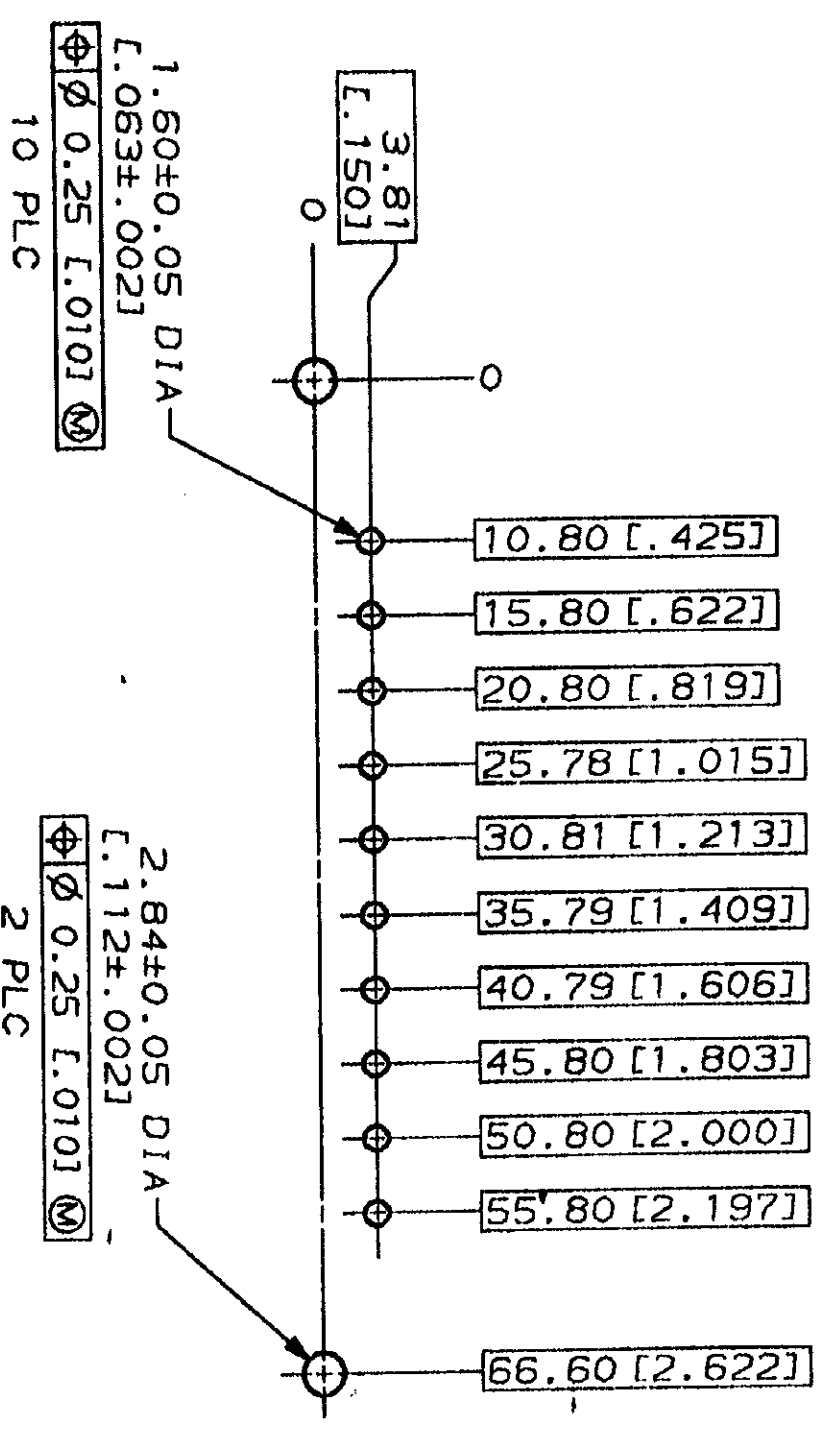
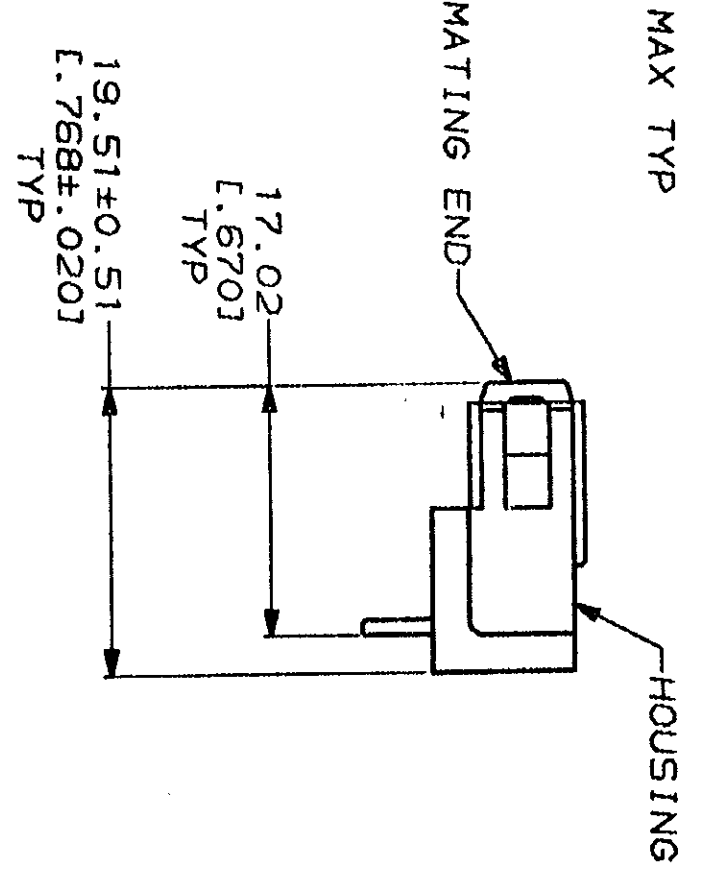
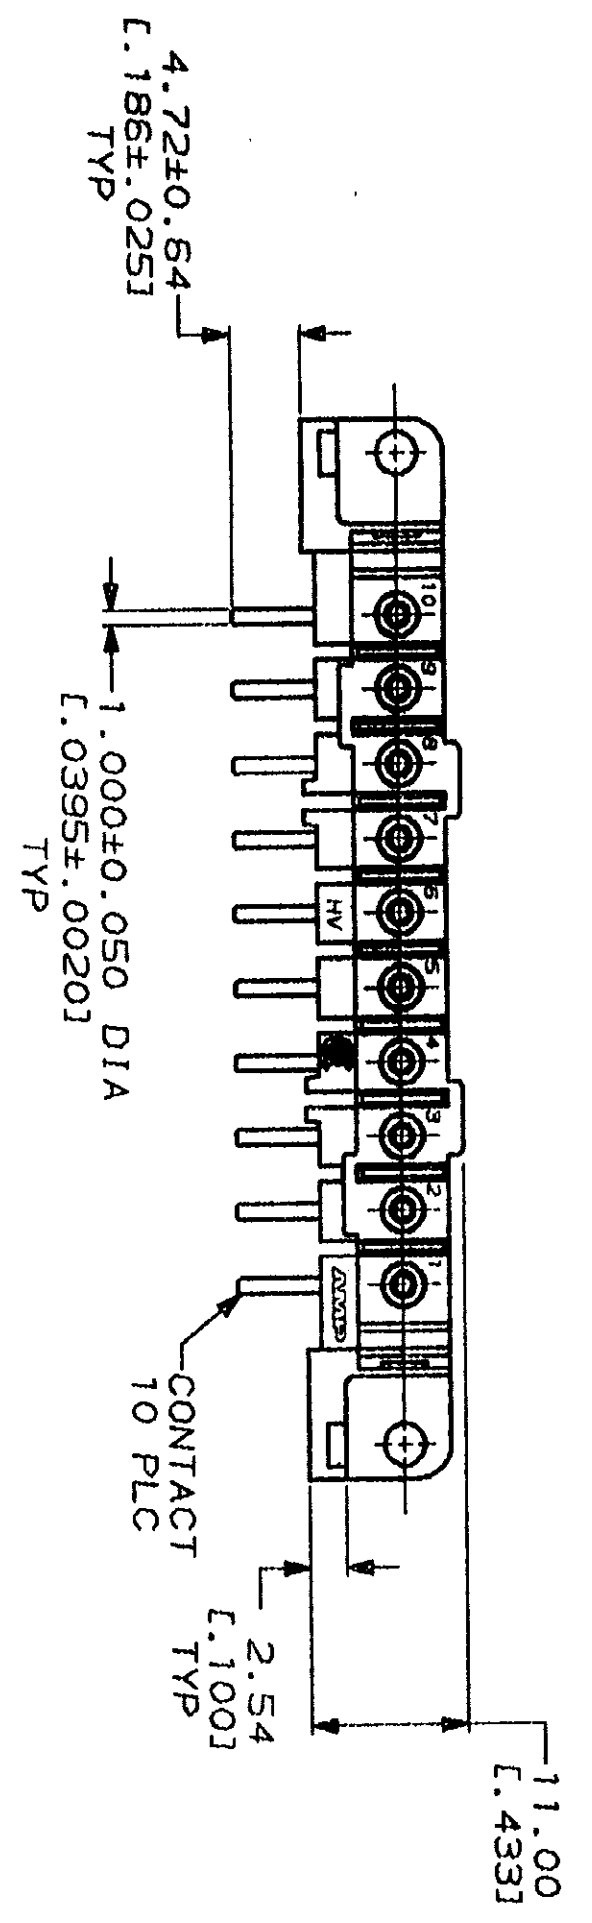


REV	LOC	DIST	DESCRIPTION	DATE	APPD
1	BD	37	REV & REDRAWN PER ECN BD6505	08/08/92	-

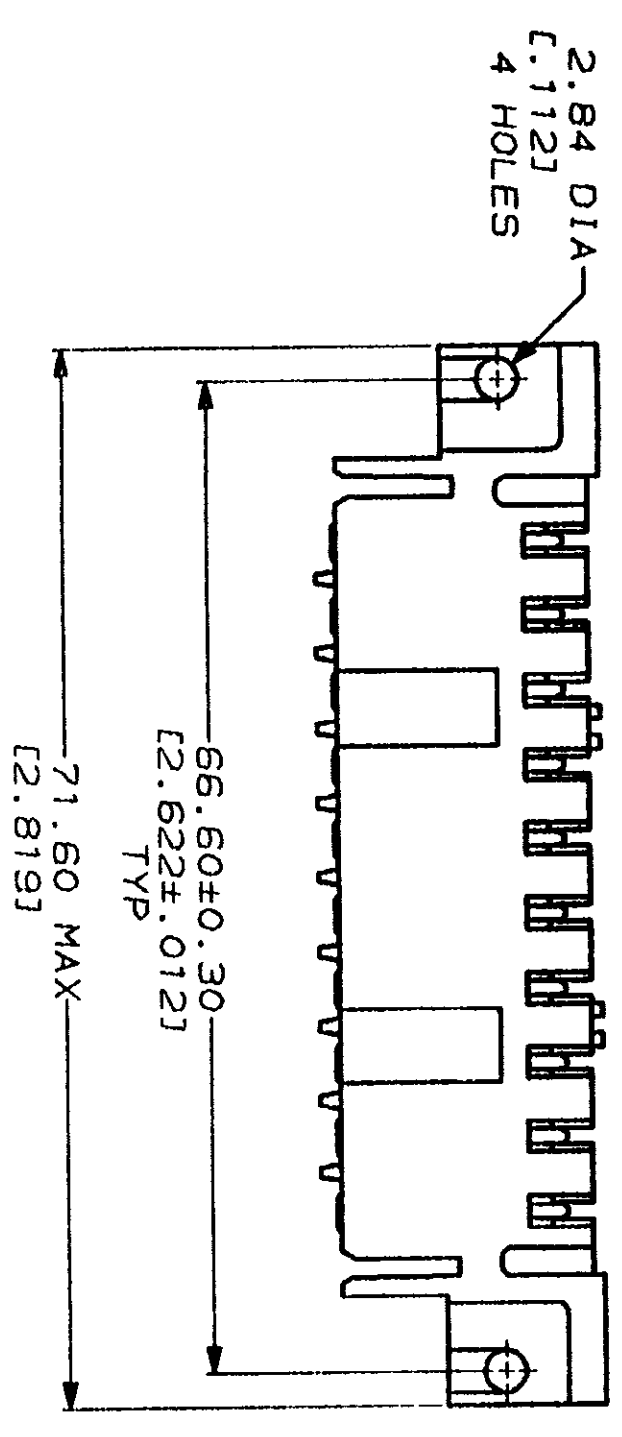

RECOMMENDED PC BOARD LAYOUT

- 1 3.81µm [1.000150] MIN TIN-LEAD OVER 0.76µm [1.000030] MIN NICKEL.
- 2 0.76µm [1.000030] MIN GOLD FOR A LENGTH OF 5.08 [1.200] MIN FROM MATING END, 3.81µm [1.000150] MIN TIN-LEAD FOR A LENGTH OF 5.23 [1.206] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [1.000050] MIN NICKEL.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN MM (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.25 [1.010] 3 PLC DEC ± . . .		DR 08/08/92 L. SIPE	AMP AMP Incorporated Harrisburg, PA 17105-3608
MATERIAL HOUSING: NYLON, RED CONTACTS: PH BRZ		CHK 8-11-92 J. MCCLINTON	NAME SOCKET HEADER ASSEMBLY, 10 POSN, IN-LINE, METRIMATE
FINISH CONTACTS: SEE TABLE		APPD 8-12-92 A. TRAVIS	SIZE CAGE CODE 00779 DRAWING NO 207612
APPLICATION SPEC 108-10033		APPD 8-12-92 C. RORDE	SCALE 2:1
WEIGHT		PRODUCT SPEC 108-10033	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING VERSION SHALL BE THE ONE SHOWN ON THE DRAWING.

CUSTOMER DRAWING