

AI 0,5 - 6 WH

Order No.: 3200687

The figure shows the version AI 0,5-6 WH

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3200687>

Ferrule, Length: 12 mm, Color: white

Commercial data

EAN	4017918094270
Pack	100 pcs.
Customs tariff	85369010
Weight/Piece	0.000073 KG
Catalog page information	Page 662 (CL-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Length (b)	12 mm
Color	white
Material	E-CU
Sleeve length	6 mm
Inner dimension of the insulating collar (d)	2.5 mm

Ferrule diameter	1.1 mm
Insulating collar thickness	0.25 mm
Sleeve wall thickness	0.15 mm

Certificates / Approvals



Certification CSA, UCSA


Accessories

Item	Designation	Description
General		
1212368	WIREFOX 2,5	Stripping tool, for conductors and cables of 0.08 to 2.5 mm diameter

Tools		
1212034	CRIMPFOX 6	Crimping pliers, for ferrules as per DIN 46228 section 1+4, 0.25 - 6.0 mm ² , insertion from the side, trapezoidal crimp
1212043	CRIMPFOX 6S-F	Crimping pliers, for ferrules as per DIN 46228 section 1+4, 0.5 - 6 mm ² , insertion from the front, square crimp
1212150	WIREFOX 10	Stripping tool, for wires and conductors of 0.02 - 10 mm ² , self-adjusting, stripping length up to 18 mm, cutting capacity up to 10 mm ² stranded /1.5 mm ² solid

Diagrams/Drawings

Dimensioned drawing

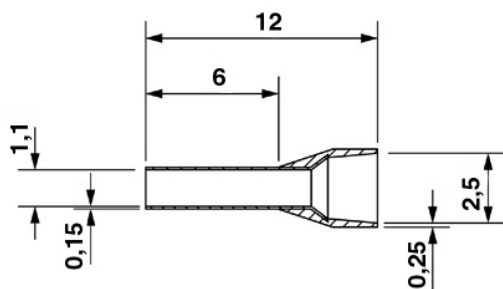

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;