



ÅÞ



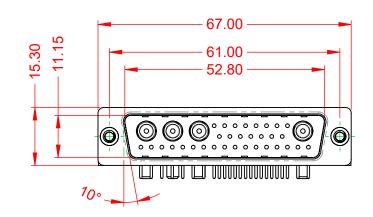




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



30A (CURRENT
5A PER CONTA
10mΩ MAX.
5000MΩ min.

.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE:


OPERATING TEMPERATURE:

IT)

-55°C ~ 125°C

ACT

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19		
		CHECKED:	DATE:		
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-36W	1640-3N4	ISSUE	
		PART NUMBER: 629-36W	4640-3N4	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

