
**Mounting Option** 


12-.128 (3.25) Dia. Side Mounting Holes

## **Contact Detail**


500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

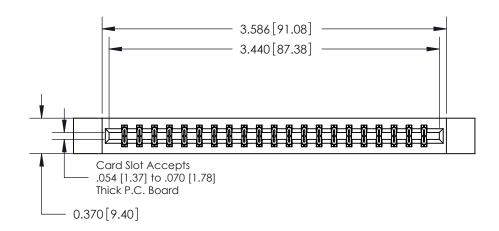

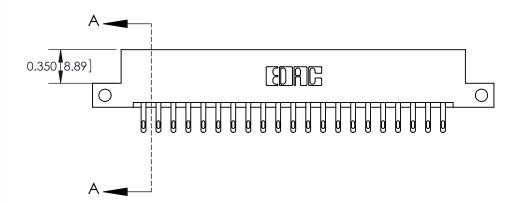





## **See Accompanying Pages for:**

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**

837 Series High Temp Card Edge Connector Part Number: 887-042-500-212



| ACAD REFERENCE NO. 837 ENG MASTER |                  |  |  |  |
|-----------------------------------|------------------|--|--|--|
| DRAWN: J.LEE                      | DATE: OCT. 06/09 |  |  |  |
| CHECKED:                          | DATE:            |  |  |  |
| SCALE: NTS                        | SHEET 1 OF 4     |  |  |  |
| DRAWING NUMBER                    | ISSUE            |  |  |  |

837 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER

ISSUE NUMBE

ORIGINAL

1



| 837 Series High Temp Card Edge Connector<br>Contact Bend Detail |  | ACAD REFERENCE NO. 837 ENG MASTER |          |                  |  |
|---|--|-----------------------------------|----------|------------------|--|
|   |  | DRAWN: J.LEE                      | DATE: OC | DATE: OCT. 06/09 |  |
|   |  | CHECKED:                          | DATE:    |                  |  |
| EDAC INC  | ONTARIO  ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | SCALE: NTS                        | SHEET :  | 2 OF 4           |  |
| TORONTO, ONTARIO  |  | DRAWING NUMBER                    | •        | ISSUE            |  |
| YOUR CONNECTION TO QUALITY & SERVICE                            |  | 837 Assembly                      |          | 1                |  |





## **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

|                             | 837 Series High Temp Card Edge Connector |   | ACAD REFERENCE NO. 837 ENG MASTER |             |           |        |
|-----------------------------|--|---|-----------------------------------|-------------|-----------|--------|
| Features and Specifications |  | DRAWN:  | J.LEE                             | DATE: OC    | CT. 06/09 |        |
|                             | redictes and specifications              |   | CHECKED:                          |             | DATE:     |        |
|                             |  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE:                            | NTS         | SHEET .   | 4 OF 4 |
|                             | TORONTO, ONTARIO                         |   | DRAWING                           | NUMBER      |           | ISSUE  |
|                             | YOUR CONNECTION TO QUALITY & SERVICE     |   | 8                                 | 37 Assembly |           | 1      |