

т	۵	н п	m	0



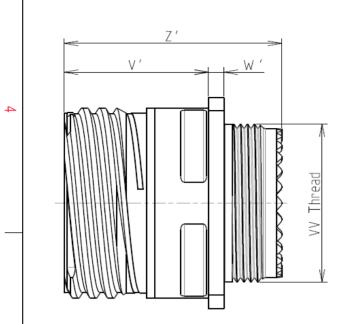

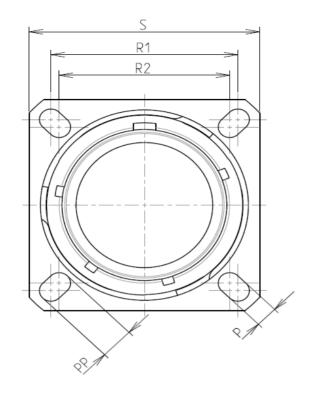

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories					
	-Temperature Range	: -65℃ to +175℃			

: 2000 hours

8D 0

G


21

J

77

F

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V'	18.7+1.4/-0
W'	2.1/4.35
Z'	32 Max
VV THREAD	M31x1-6g

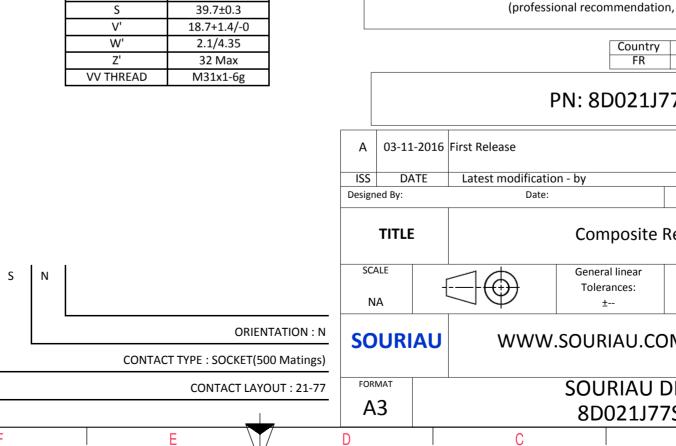

0		Ξ		Þ	
					4
LAY	YOUT SHOWN AS EXA	MPLE			3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed PN: 8D021J77SN					
First Release					
Latest modificatio Date:	n - by		CUSTOMER DRAW	MOD N°	
	Composite	Receptacl			
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJEC 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU SOURIAU it must not be reproduced or communicated without permission					
SOURIAU DRG N° SHEET 8D021J77SN-C 1/2					
С		B		A	J

_	т	۵	г	m	D	0	
		Contact Layout				F	anel Cutou
4		77			τ <u>α</u> –	SQUARE FLANGE RECEPTACLE (TYPE 0)	2
		17#22D 2#8 Triax					
		21-77	7		¥		
	Ctc	X Y				ØA.	ØT
	A	1.96 8.38	_				
	B	5.46 7.67	_			Dim	
ω	C D	8.51 5.79 10.46 2.82	-			ØA	
	E	10.46 -2.82				ØAA R1	
	F	8.51 -5.79				ØТ	
	G	5.46 -7.67	_				
	н	1.96 -8.38 0 -5.41	_				
-		0 -5.41 -1.96 -8.38	-				
	L	-5.46 -7.67				SOURIAU shall not be lia due to a use of the P	
	M	-8.51 -5.79				the Specifications issued b	oy either of
	N	-10.46 -2.82	_			(professional rec	ommendati
	P	-10.46 2.82	_				Country
N	R	-8.51 5.79 -5.46 7.67	-				FR
	Т	-1.96 8.38				PN: 8	D021J
	U	-4.57 0					0021
	V	4.57 0			A 03-11-20	16 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Со	mposite
<u> </u>					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOU	RIAU.C
					FORMAT A3		JRIAU 0021J7
L	Н	G	F	E	D	С	
					•		

