
Ξ			0	₩	Þ	
	ØS					
			LAYOUT SHOWN AS E	EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS	Connector dimension]				
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	DimNominalØS32.5 MaxZ'31.5 MaxVV THREADM22x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed			
 -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories 			PN: 8D515M19SE			
-Temperature Range65°C to +200°C		A 19-10-20	016 First Release			
-Salt Spray : 2000 hours - Mass : 29.6 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	CUSTOMER	MOD N°	
		TITLE	TITLE Composite Plug 8D series			
BASIC SERIES: 8D 5 - 15 M SHELL TYPE : Plug with RFI Shielding	19 S E	SCALE	General linear Tolerances:	NPRDS / 1 85		
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 15 CONTACT TYPE : SOCKET(500 Matings)			SOURIAU This document is the property of SOURIAU it must not be reproduced or communicated without permission			
SHELL SIZE : 15						
SHELL SIZE : 15 PLATING : M = Nickel	CONTACT LAY	OUT : 15-19 FORMAT A3	SOURIAU 8D515M		SHEET	

ſ	I	۵	г П	m		0
		Contact Layout				
4	×	$\begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \\ \end{array} \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \begin{array}{c} \end{array} \\ \begin{array}{c} \begin{array}{c} \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \begin{array}{c} \end{array} \\ \end{array} $				
	Contact position ID Loca (mm) A +.000 (0.00) B +.130 (3.30) C 155 (4.95) D +.260 (6.60) E +.130 (3.30) G +.000 (0.00) H 130 (3.30) J J J 195 (4.95) K 260 (6.60)	Contacts Location Location V-axis V-axis Y-axis mm ID (mm) (mm) (mm) +225 (5.72) L -195 (4.95) +.113 (2.87) +225 (5.72) M -130 (3.30) +226 (5.72) -113 (2.87) N -005 (1.65) +.113 (2.87) -113 (2.87) R +130 (3.30) +000 (0.00) -225 (5.72) T -065 (1.65) 113 (2.87) -225 (5.72) T -065 (1.65) 113 (2.87) -225 (5.72) U -130 (3.30) +000 (0.00) -113 (2.87) V +005 (1.05) 113 (2.87) -225 (5.72) U -130 (3.30) +000 (0.00) -113 (2.87) V +000 (0.00) 000 (0.00) +.132 (3.7) V +000 (0.00) 000 (0.00) +.000 (0.00)				
ω		nber of Size Service Contact Supersedes tacts contacts rating location 19 20 I All MS20052-19				
	l					
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						
						PN: 8D5151
					A 19-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:
					TITLE	Compo
<u> </u>					SCALE NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D515M
L	Н	G	F	E	D	C

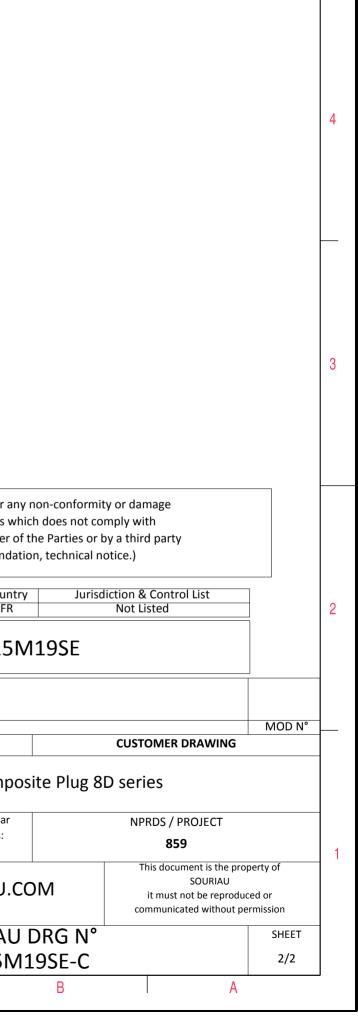

 \triangleright

σ