



(1)

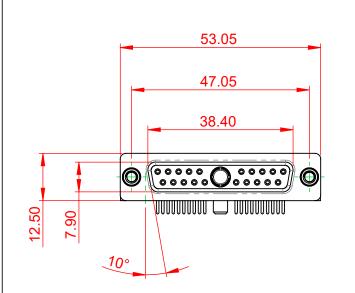



NOTES:

MATERIAL: HOUSING: SHELL:


WITHSTANDING VOLTAGE:

.XX

±0.13

.XXX ±0.05

THERMOPLASTIC POLYESTER, UL94V-0 OTEEL NUCKEL DLATED



CONTACT:	COPPER ALLOY, 30µ GOLD PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

SW REFERENCE NO .: 630 COMBO ASSEMBLY COMBINATION D-SUB DRAWN: C.B DATE: JAN. 01/2019 CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS OF 2 SCALE: (IN C.A.D. 1:1) SHEET 1 EDAC INC ARE THE PROPERTY OF EDAC INC..AND TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 630-21W1640-4NE ISSUE DRAWING NUMBER: OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS 1 YOUR CONNECTION TO QUALITY & SERVICE PART NUMBER: 630-21W1640-4NE WITHOUT WRITTEN PERMISSION.



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

1000V AC rms

20	

