

	Ŧ	Q	п	m	0





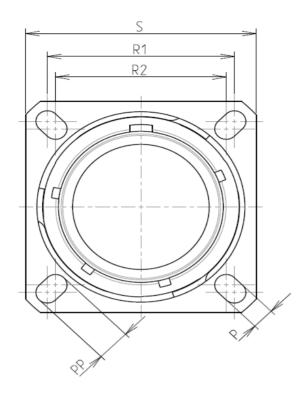

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 13

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered without Souriau contacts				
-Temperature Range	: -65°C to +200°C			

: 500 hours

8D 0

G

13

S

03

S


F

А L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

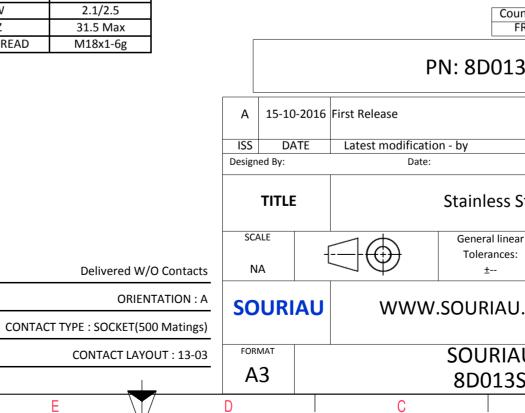

σ		А		_	
				4	
AS EXAMPLE				3	
which does no er of the Parties adation, technic	or by a third pa	rty htrol List		2	
	CUSTOM	ER DRAWING	MOD N°		
Steel Receptacle 8D series					
ar	NPRDS / PROJECT 859				
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
UDRG N° SHEET					
SO3SAL-C	-	A	1/2	J	

-	<u>т</u>	۵	гт —	m	D	0	
		Contact Layout				SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	Panel Cuto
4		03 () () () () () () () () () () () () ()			2	REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47				[ΔA Dim
ω						<u> </u>	ØA ØAA R1 ØT
	-					SOURIAU shall not I due to a use of t the Specifications issu (professional	he Products w ued by either c l recommenda
N						PN:	Count FR : 8D0135
					A 15-10-2 ISS DATE Designed By:	D16 First Release Latest modification - Date:	by
-					SCALE		General linear Tolerances: ±
					SOURIA	U WWW.SC	
					FORMAT A3		OURIAL 8D013S
	Н	G	F F	E	D	C	

