

т	۵	н п	m	D	0





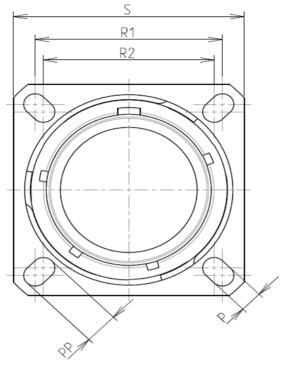

Keying Shown as e

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	_∶ -65°C to +175°C				
-Salt Spray	: 500 hours				

: 16.46 g ± 10%

8D 0

G

13

-

Z

26

Ρ

F

С

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	23.01			
R2	20.62			
S	28.6±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M18x1-6g			

m	D		0		Φ	A	
				YOUT SHOWN AS EXA	MPLE		4
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62			due to a use	not be liable for any n of the Products which issued by either of th	n does not comply w	ith	
N2 20.02 S 28.6±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M18x1-6g	-	the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Image: Country Image					
		PN: 8D013Z26PC A 17-10-2016 First Release					
		A 17-10-2016 SS DATE signed By:	First Release Latest modificatio Date:	n - by	CUST	OMER DRAWING	MOD N°
		TITLE Aluminium Receptacle 8D series			series		
		SCALE -		General linear Tolerances: ±		PRDS / PROJECT 859	1
ORIEI CONTACT TYPE : PIN(5		SOURIAU WWW.SOURIAU.COM SOURIAU it must not be reprod			This document is the prop SOURIAU it must not be reproduc ommunicated without pe	ced or	
CONTACT LAYOUT : 13-26		FORMATSOURIAU DRG N°A38D013Z26PC-C			SHEET 1/2		
E	D		С		В	A	

_	т	۵	н п	т	D	0
		Contact Layout				Panel Cutou
4	(26			- R	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		6#22D			V	
ω	Ctc A B C D E F 1 2	13-26 X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
	+					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						Countr FR
						PN: 8D0132
_					A 17-10-201	16 First Release Latest modification - by
					Designed By:	Date: Aluminium
_ _					SCALE	General linear Tolerances:
					SOURIAU	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D013Z2
L	Н	G	F	E	D	C

